


Altistart and Altivar

Use Altistart soft starters to start your motors smoothly and so protect the mechanics of your equipment. With the Altivar range of variable speed drives, you save energy and manage the speed of your motors to optimise and enhance productivity in your installations.



3

The Altistart, Altivar and Lexium ranges increase the efficiency of your machines, reduce their energy consumption and optimise their kinematics. Easy to install, offering intuitive programming and extensive communication options, they are easily integrated into your control system architectures.

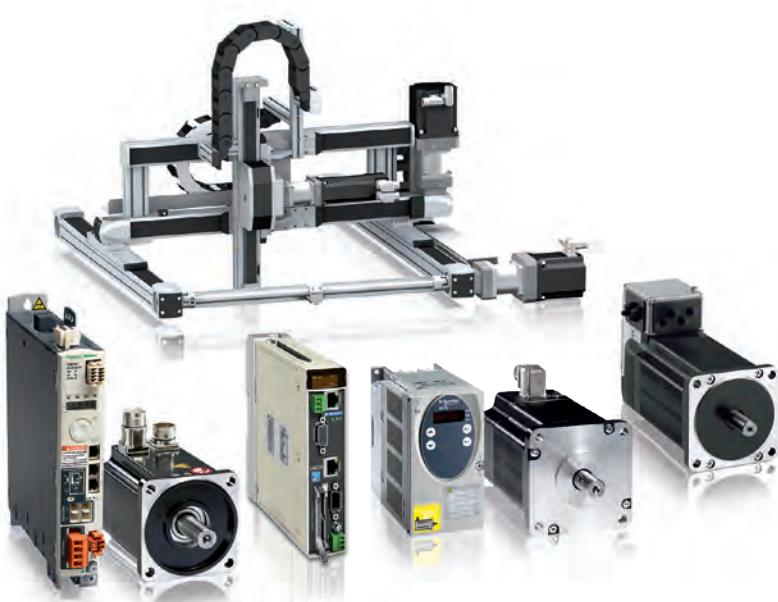

Lexium

Controllers, drives, motors and linear positioning axes: Schneider Electric offers a complete range of motion control products and solutions suitable for even the most specialised applications. Designed with maximum simplicity in mind throughout a machine's entire service life, the Lexium range reduces costs and optimises productivity.

3

Motion and Drives



WARNING

This document is a selection of the top selling products.

Soft starters and variable speed drives

Selection guide	3/3 and 3/7
------------------------	-------------

Starters

Altistart 01	3/8 and 3/9
Altistart 22	3/10 and 3/11
Altistart 48	3/12 and 3/13

Drives

Altivar 12	3/14
Altivar 212	3/15
Altivar 312	3/16
Altivar 31C	3/17
Altivar 32	3/18
Altivar 61, 61Q, 61 Plus	3/19 to 3/25
Specific cards and extension for pumping and ventilation machines	3/26 and 3/27
Altivar 71, 71Q, 71 Plus	3/28 to 3/34
Altivar LIFT	3/35
Specific cards and extension for complex and high power machines	3/36 and 3/37

Accessories and options (Altistart et Altivar)	3/38 and 3/39
---	---------------

Controllers, drives, motors and linear motion axes

Selection Guide	3/40 to 3/42
------------------------------	--------------

Motion Controller Lexium LMC	3/43
---	------

Servo drives, servo motors Lexium 32 and accessories	3/44 to 3/51
---	--------------

Lexium 32 servo drives
Lexium BMH and Lexium BSH servo motors

Stepper Drives and Stepper Motors Lexium SD	3/52
--	------

Lexium SD2/Lexium SD3 stepper drives
Lexium BRS2/Lexium BRS3 stepper motors

Integrated Drives Lexium IL	3/53 to 3/55
--	--------------

Lexium ILA/ILE/ILS/ILT/ILP

Single axes and multi-axis Systems Linear Motion	3/56 and 3/57
---	---------------

Lexium PAS/CAS/TAS/MAX

Highlights

3



Altivar 32



More than 150 application-specific functions

The Altivar 32 range of variable speed drives controls asynchronous and synchronous motors rated from 0.18 to 15 kW operating in open loop mode in complex machines:

- Compact, vertical and slim format (45 mm)
- Integrated function blocks for creating simple control system functions (timers, counters, comparators, etc.)
- Machine safety functions integrated as standard (STO, SLS, SS1)
- Open design: communicates with most industrial networks

For more information, see page 3/18

Lexium 32

Inspired by Simplicity



The Lexium 32 servo drive range (0.15 to 7 kW) is a drive system designed for applications where high precision and dynamic positioning are critical:

- Suitable for packaging, materials processing (cutting, turning, milling, etc.) and handling, printing and textile applications
- 3 servo drive families and two types of servo motor available
- Simplified engineering: motor sizing, CAD and cabinet drawings, support for PLCopen libraries and SoMove setup software
- Integrated "Safe Torque Off" function
- Quick integration: wide selection of fieldbus modules

For more information, see page 3/44



Ultra slim and ultra powerful

Practical and innovative, the Altivar 32 and Lexium 32 ranges can help reduce the size of your enclosures by as much as 40%.

- Extra slim book format
- Easy to configure and setup with SoMove software
- Packed with common software tools, accessories and functions
- Homogeneous mounting and wiring systems
- High-performance communication system
- Built-in Bluetooth as standard
- Can be configured with the power off in its original packaging: configurations can be transferred remotely via mobile phone using SoMove Mobile software

Selection guide

Starters - Low voltage

3

Starters - Low voltage				
Simple machines		Complex machines/ Special machines		
⇒Applications: Compressors, fans, pumps, conveyors, car wash gantries, etc.		⇒Applications: Pumps, fans, turbines, compressors, conveyors, conveyor belts, lifting screws, escalators, etc.		⇒Applications: Pumps, high inertia fans and machines, compressors, conveyors, agitators, mixers, escalators, etc.
 Altistart 01		 Altistart 22		 Altistart 48
Description		<ul style="list-style-type: none"> Compact Simple: easy mounting, wiring and adjustment Efficient: Current peaks limitation on starting, reduction of mechanical shocks, increased service life for your machines Energy saving 	<ul style="list-style-type: none"> Innovative with its integrated Bypass contactor for motors up to 315 kW Cost-effective Compact dimensions Quick setup Protection of motor and starter Energy saving 3 controlled phases 	Torque control system: controlled torque, prevention of pressure surges and limiting of temperature rises <ul style="list-style-type: none"> Simple: quick setup Protection of motor and starter: thermal protection, phase loss detection, locked rotor detection Energy saving
Technical information	Power range for 50...60 Hz supply 0.37...15 kW 0.5...20 HP	0.37...15 kW 0.5...20 HP	4...400 kW 3...500 HP	4...1200 kW 2...200 HP
	Voltage	Single-phase 110...480 V Three-phase 110...480 V	Three-phase 208...600 V Three-phase 230...440 V	Three-phase 208...690 V
	Drive/Output frequency	–	–	–
	Motor type	Asynchronous	Yes	Yes
		Synchronous	No	No
Communication	Integrated	–	Modbus	Modbus
	As an option	Can be used with TeSys U motor starter-controller to create a complete motor starter solution	–	DeviceNet, Fipio, PROFIBUS DP, Ethernet
Standards and certifications		IEC/EN 60947-4-2, C-Tick, CSA, UL, CE	IEC/EN 60947-4-2, C-Tick, CSA, UL, CE, GOST, CCC Class A EMC	IEC/EN 60947-4-2, C-Tick, CSA, UL, CE, DNV, GOST, CCC, NOM, SEPRO and TCF Classes A and B EMC
Intended use		Buildings, Simple machines.	Machines, Infrastructures and Buildings	

Selection guide

3

Standard drives - Low voltage

Simple machines

⇒ *Applications:*

- Simple machines for industry (small handling applications, packaging, pumps, fans, etc.)
- Simple consumer machines (access barriers, rotating advertising hoardings, medical beds, treadmills, dough mixers, etc.)
- Other types of application:
 - Mobile machines and small appliances equipped with a power socket
 - Applications which traditionally use other solutions (2-speed DC motors, mechanical drives, etc.).

⇒ *Applications:*

Simple industrial machines (material handling and packaging, textile machines, special machines, pumps and fans).

⇒ *Applications:*

Simple industrial machines (material handling and packaging, textile machines, special machines, pumps and fans).

Altivar 12



Variable speed drives for small machines with 240 V three-phase asynchronous motor

Altivar 312



Variable speed drives for three-phase asynchronous motors

Altivar 31C IP55



Variable speed drives for three-phase asynchronous motors for machines in harsh environments.

Description

- **Compact**
- **Easy to set up** (Plug & Play)
- **Reliable, cost-effective solution** for compact machines

- **Open:** large number of communication cards available as options
- **User-friendly:** simplified interface
- **Autotuning:** maximum performance

- **Rugged** even in the most hostile environments:
 - Installed as close as possible to the motor
 - Integrated functions for applications requiring IP55 degree of protection
 - Modbus and CANopen communication protocols
- **Flexibility** to adapt to each machine:
 - Customisable depending on the model
 - Easy configuration

Technical information

Power range for 50...60 Hz supply

0.18...4 kW
0.25...5 HP

0.18...15 kW
0.5...20 HP

0.18...15 kW
0.5...20 HP

Voltage

Single-phase 100...240 V
Three-phase 200...240 V

Single-phase 200...240 V
Three-phase 200...600 V

Single-phase 200...240 V
Three-phase 380...500 V

Drive/Output frequency

0.5...400 Hz

0.5...500 Hz

0.5...500 Hz

Motor type	Asynchronous
	Synchronous

Yes
No

Yes
No

Yes
No

Communication

Integrated
As an option

Modbus
—

Modbus and CANopen
CANopen Daisy chain, DeviceNet, PROFIBUS DP, Modbus TCP, Fipio

Modbus and CANopen
DeviceNet, Ethernet TCP/IP, Fipio, PROFIBUS DP

Standards and certifications

IEC/EN 61800-5-1, IEC/EN 61800-3 (environments 1 and 2, categories C1 to C3)
CE, UL, CSA, C-Tick, GOST, NOM

IEC/EN 61800-5-1, IEC/EN 61800-3 (environments 1 and 2, categories C1 to C3)
CE, UL, CSA, C-Tick, GOST

Intended use

Machines

Other versions: please consult our Customer Care Centre.

Complex machines	Complex machines/ Special machines	Pumps and Fans		
⇒ Applications: Industrial machines: hoisting, packaging, material handling, special machines (wood- working machines, metal processing machinery, etc.).	⇒ Applications: High performance applications: • Material handling • Hoisting • Wood-working machines • Process machinery • Textile machines • Packaging	⇒ Applications: High performance applications: • Material handling • Hoisting • Wood-working machines • Process machinery • Textile machines • Packaging	⇒ Applications: Range specifically for high performance pumps and fans for the industrial and building markets.	⇒ Applications: Pumping and ventilation machines in harsh environment
Altivar 32 	Altivar 71 	Altivar 71Q 	Altivar 61 	Altivar 61Q 
Variable speed drives for asynchronous motors and open-loop synchronous motors	For three-phase synchronous and asynchronous motors. Constant torque applications.	Water-cooled variable speed drives for three-phase synchro- nous and asynchronous motors. Constant torque applications.	Variable speed drives for three- phase asynchronous motors. Variable torque applications.	Water-cooled variable speed drives for three-phase asynchr- o nous and synchronous motors. Variable torque applications
• Compact: "Book" format • Integrated Safety function compliant to IEC 61508 SIL3 and PL-e • Open: communication cards available as options • Integrated programmable logic functions • Simple setup • Energy saving : Control of energy efficient permanent magnet synchronous motors	• Wide range • Quick start-up and easy diagnostics: multi-language graphic display terminal • Open to most industrial communication buses • Integrated safety functions • Motor control: high-performance in open-loop and closed loop mode	• Improved robustness with water cooling • Efficient cooling system reduced need of air conditioning • Long time operation without maintenance • Excellent protection against corrosion due to stainless steel cooling pipes • Very high starting torque for frequent start-up applications	• Wide range • Easy setup and diagnostics with the multi-language graphic display terminal • Open to the main communication buses	• Improved robustness with water cooling • Efficient cooling system reduced need of air conditioning • Prolonged maintenance-free operational life • Excellent protection against corrosion due to stainless steel cooling pipes
0.18...15 kW 0.25...20 HP	0.37...630 kW 0.5...700 HP	90...630 kW 125...700 HP	0.37...800 kW 0.5...900 HP	110...800 kW 150...900 HP
Single-phase 200...240 V Three-phase 380...480 V	Single-phase 200...240 V Three-phase 200...690 V	Three-phase 380...480 V Three-phase 500...690 V	Single-phase 200...240 V Three-phase 200...690 V	Three-phase 380...480 V Three-phase 500...690 V
0.1...599 Hz	0...599 Hz up to 37 kW / 200...240V and 380...480V 0...500 Hz for the rest of the range	0...500 Hz	0.1...599 Hz up to 37 kW / 200...240V and 380...480V 0.1...500 Hz for the rest of the range	0.1...500 Hz
Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes
Modbus and CANopen	Modbus and CANopen	Modbus et CANopen	Modbus and CANopen	Modbus et CANopen
EtherNet/IP, Modbus TCP, PROFIBUS DP V1, EtherCAT, Devicenet	Modbus TCP, Fipio, Modbus/Uni-Telway, Modbus Plus, EtherNet/IP, DeviceNet, PROFIBUS DP, PROFIBUS DP V1, INTERBUS S, CC-Link,	Modbus TCP, Fipio, Modbus/Uni-Telway, Modbus Plus, EtherNet/IP, DeviceNet, PROFIBUS DP, PROFIBUS DP V1, INTERBUS S, CC-Link,	Modbus TCP, Fipio, Modbus/Uni-Telway, Modbus Plus, EtherNet/IP, DeviceNet, PROFIBUS DP, PROFIBUS DP V1, INTERBUS S, CC-Link, Lonworks, METASYS N2, APOGEE FLN P1, BACnet	HVAC protocols : LonWorks, BACnet, METASYS N2, APOGEE FLN P1 Industrial protocols: Modbus TCP, Modbus/Uni-Telway, Fipio, Modbus Plus, PROFIBUS DP, PROFIBUS DP V1, DeviceNet, Ethernet IP, CC-Link, INTERBUS
IEC/EN 61800-5-1, IEC/EN 61800-3 (environments 1 and 2, Categories C2 and C3), UL508C, EN 954-1 Category 3, ISO/EN 13849-1/-2 Category 3 (PLd), IEC 61800-5-2, IEC 61508 (parts 1&2) level SIL1 SIL2 SIL3, draft standard EN 50495E, CE, UL, CSA, C-Tick, GOST, NOM.	IEC/EN 61800-3, EN 55011, EN 55022, CSA, UL, C-TICK, CE, NOM, DNV, GOST	IEC/EN 61800-3, EN 55011, EN 55022, CSA, UL, C-TICK, CE, NOM, DNV, GOST	IEC/EN 61800-3, EN 55011, EN 55022, CSA, UL, C-TICK, CE, NOM, DNV, GOST	IEC/EN 61800-3, EN 55011, EN 55022, CSA, UL, C-TICK, CE, NOM, DNV, GOST
Machines	Machines, industrial processes and infrastructures	Machines, industrial processes or infrastructures	Buildings and infrastructures	Building or infrastructures

Selection guide

3

Specialized drives - Low voltage

HVAC	Lifts																								
<p>⇒ <i>Applications:</i> Range specifically for HVAC applications (heating, ventilation, air conditioning) in buildings.</p>	<p>⇒ <i>Applications:</i> Lifts</p>																								
<p>Altivar 212</p>  <p>Variable speed drives for three-phase asynchronous motors. Variable torque building HVAC applications.</p>	<p>Altivar LIFT</p>  <p>Variable speed drives for lifts.</p>																								
<p>Description</p>	<ul style="list-style-type: none"> Compact size: side-by-side mounting Simplicity : Dedicated HVAC functions and remote graphic keypad option Openness : Integrated communications for building management systems EMC filters built-in Reduction of the total harmonic distortion THDI<30% Protection class: IP21 and IP55 																								
<p>Technical information</p>	<table border="1"> <tbody> <tr> <td>Power range for 50...60 Hz supply</td><td>0.75...75 kW 1...100 HP</td><td>4...22 kW 5...30 HP</td></tr> <tr> <td>Voltage</td><td>Three-phase 200...480 V</td><td>Single-phase 200...240 V Three-phase 200...480 V</td></tr> <tr> <td>Drive/Output frequency</td><td>0.5...200 Hz</td><td>0...599 Hz</td></tr> <tr> <td>Number of quadrants</td><td>—</td><td>—</td></tr> <tr> <td>Cooling system</td><td>—</td><td>—</td></tr> <tr> <td>Protection class</td><td>—</td><td>—</td></tr> <tr> <td>Motor type</td><td>Asynchronous</td><td>Yes</td></tr> <tr> <td></td><td>Synchronous</td><td>No</td></tr> </tbody> </table>	Power range for 50...60 Hz supply	0.75...75 kW 1...100 HP	4...22 kW 5...30 HP	Voltage	Three-phase 200...480 V	Single-phase 200...240 V Three-phase 200...480 V	Drive/Output frequency	0.5...200 Hz	0...599 Hz	Number of quadrants	—	—	Cooling system	—	—	Protection class	—	—	Motor type	Asynchronous	Yes		Synchronous	No
Power range for 50...60 Hz supply	0.75...75 kW 1...100 HP	4...22 kW 5...30 HP																							
Voltage	Three-phase 200...480 V	Single-phase 200...240 V Three-phase 200...480 V																							
Drive/Output frequency	0.5...200 Hz	0...599 Hz																							
Number of quadrants	—	—																							
Cooling system	—	—																							
Protection class	—	—																							
Motor type	Asynchronous	Yes																							
	Synchronous	No																							
<p>Communication</p>	<table border="1"> <tbody> <tr> <td>Integrated</td><td>Modbus, METASYS N2, APOGEE FLN P1, BACnet</td><td>Modbus and CANopen</td></tr> <tr> <td>As an option</td><td>Lonworks</td><td>Modbus TCP, Fipio, Modbus/Uni-Telway, Modbus Plus, EtherNet/IP, DeviceNet, PROFIBUS DP, PROFIBUS DP V1, INTERBUS S, CC-Link</td></tr> </tbody> </table>	Integrated	Modbus, METASYS N2, APOGEE FLN P1, BACnet	Modbus and CANopen	As an option	Lonworks	Modbus TCP, Fipio, Modbus/Uni-Telway, Modbus Plus, EtherNet/IP, DeviceNet, PROFIBUS DP, PROFIBUS DP V1, INTERBUS S, CC-Link																		
Integrated	Modbus, METASYS N2, APOGEE FLN P1, BACnet	Modbus and CANopen																							
As an option	Lonworks	Modbus TCP, Fipio, Modbus/Uni-Telway, Modbus Plus, EtherNet/IP, DeviceNet, PROFIBUS DP, PROFIBUS DP V1, INTERBUS S, CC-Link																							
<p>Standards and certifications</p>	<p>IEC/EN 61800-3, EN 55011, EN 55022, CSA, UL, C-TICK, CE, NOM</p>																								
<p>Intended use</p>	<p>Buildings</p>																								
	<p>Machines</p>																								

Notes

3

Altistart 01

0.37...15 kW

0.5...20 HP

Simple machines Starters



Dimensions (in mm)		width x height x depth
ATS01	N103FT/N106 FT	22.5 x 100 x 100.4
	N109FT/N112 FT/N125 FT	45 x 124 x 130.7
	N206●●/N209●●/N212●●	
	N222●●/N232●●	45 x 154 x 130.7

Type	Soft start units	Soft start/soft stop units		
Motor power	0.37 to 11 kW	0.75 to 15 kW		
Degree of protection	IP20			
Reduction of current peaks	2 controlled phases	2 controlled phases		
Adjustable starting time	1...5 s	1...10 s		
Adjustable deceleration time	No: freewheel stop	Yes: 1... 10 s		
Adjustable breakaway torque	30...80% of DOL motor starting torque			
Logic inputs	–	3 logic inputs (start, stop and startup boost)		
Logic outputs	–	1 logic output		
Relay outputs	–	1 relay output		
Control supply voltage	110...220 VAC ± 10%, 24 VDC ± 10%	Built into the starter		
Supply voltage	Single-phase 110...230 V			
Motor power				
230 V kW	Nominal current (I _{cL})			
0.37	3 A	ATS01N103FT		
0.75	6 A	ATS01N106FT		
1.1	9 A	ATS01N109FT		
1.5	12 A	ATS01N112FT		
2.2	25 A	ATS01N125FT		
Supply voltage	Three-phase 110...480 V	Three-phase 200...240 V	Three-phase 380...415 V	Three-phase 440...480 V
Motor power				
210 V HP	230 V kW	400 V HP	460 V HP	Nominal current (I _{cL})
–	0.37-0.55	0.5/-	1.1	3 A
0.5	0.75-1.1	1-1.5	2.2-3	6 A
1	1.5	2	4	9 A
1.5	2.2	3	5.5	12 A
–	4-5.5	5-7.5	7.5-11	22 A
2-3	3-4.5.5	5-7.5	7.5-9-11	25A
–	7.5	10	15	32 A

Starters with TeSys model U



Dimensions (in mm)		width x height x depth
ATSU01	N206LT/N209LT/N212LT	45 x 124 x 130.7
	N222LT/N232LT	45 x 154 x 130.7

Type	Soft start/soft stop units			
Motor power	0.75 to 15 kW			
Degree of protection	IP20			
Reduction of current peaks	Yes			
Adjustable starting and stopping times	1...10 s			
Adjustable breakaway torque	30... 80% of DOL motor starting torque			
Logic inputs	3 logic inputs (start, stop and startup boost)			
Logic outputs	1 logic output			
Relay outputs	1 relay output			
Control supply voltage	24 VDC, 100 mA, ± 10%			
References	Soft start/soft stop units	TeSys starter-controller model U Power base	Control unit (1)	Power connector between ATSU and TeSys model U
Supply voltage	Three-phase 200...480 V			
Motor power				
230 V	400 V	460 V	Nominal current (I _{cL})	
kW	HP	kW	HP	
0.75	1	1.5	2	6 A
1.1	1.5	2.2/3	3	6 A
1.5	2	—	5	9 A
—	—	4	—	9 A
2.2	3	5.5	7.5	12 A
3	—	—	—	12 A
4	5	7.5	10	22 A
5.5	7.5	11	15	22 A
7.5	10	15	20	32 A
				ATSU01N206LT LUB12 LUC•05BL VW3G4104
				ATSU01N206LT LUB12 LUC•12BL
				ATSU01N209LT LUB12 LUC•12BL VW3G4104
				ATSU01N209LT LUB12 LUC•12BL
				ATSU01N212LT LUB12 LUC•12BL VW3G4104
				ATSU01N212LT LUB32 LUC•18BL
				ATSU01N222LT LUB32 LUC•18BL VW3G4104
				ATSU01N222LT LUB32 LUC•32BL
				ATSU01N232LT LUB32 LUC•32BL VW3G4104

(1) To compose your reference, replace • in the reference with: «A» for a standard control unit, «M» for a multifunction unit and «B» for an advanced unit.

Altistart 22

4...400 kW

3...500 HP

Simple machines Soft start/soft stop units



Dimensions (en mm)	width x height x depth
Size A: 130 x 265 x 169	
Size B: 145 x 295 x 207	
Size C: 150 x 356 x 229	
Size D: 206 x 425 x 299	
Size E: 304 x 455 x 340	

Supply voltage	Three-phase 208...600 V	Three-phase 230...440 V
Protection	Degree of protection	IP20: for ATS 22D17●●●D88 starters IP00: for ATS 22C11●●●C59 starters (protection of terminals available as an option)
	Motor thermal protection	Class 10, 20 or 30
Drive	Number of controlled phases	3
	Types of control	Configurable voltage ramp, torque ramp
	Operating cycle	Standard
Functions		Integrated Bypass contactor
Number of I/O	Analog inputs	1 PTC probe
	Logic inputs	3
	Logic outputs	—
	Analog outputs	—
	Relay outputs	2
Dialogue		Integrated display terminal, SoMove Lite setup software
Communication	Integrated	Modbus
Standards and certifications		IEC/EN 60947-4-2, class A EMC, CE, UL, CSA, C-Tick, GOST, CCC
Motor connection		Possible to connect the starter in the motor delta connection

Connection in the motor power supply line					Soft start/soft stop unit 230...440 V - 50/60 Hz	
Motor						
Power indicated on rating plate						
230 V kW	400 V kW	440 V kW	Nominal current starter (I _{cL})		Reference	Size
4	7.5	7.5	17		ATS22D17Q	Size A
7.5	15	15	32		ATS22D32Q	Size A
11	22	22	47		ATS22D47Q	Size A
15	30	30	62		ATS22D62Q	Size B
18.5	37	37	75		ATS22D75Q	Size B
22	45	45	88		ATS22D88Q	Size B
30	55	55	110		ATS22C11Q	Size C
37	75	75	140		ATS22C14Q	Size C
45	90	90	170		ATS22C17Q	Size C
55	110	110	210		ATS22C21Q	Size D
75	132	132	250		ATS22C25Q	Size D
90	160	160	320		ATS22C32Q	Size D
110	220	220	410		ATS22C41Q	Size D
132	250	250	480		ATS22C48Q	Size E
160	315	355	590		ATS22C59Q	Size E

Connection in the motor power supply line					Soft start/soft stop unit 230...600 V - 50/60 Hz	
Motor						
Power indicated on rating plate						
230 V kW	400 V kW	440 V kW	500 V kW	Nominal current starter (I _{cL})	Reference	Size
4	7.5	7.5	9	17	ATS22D17S6	Size A
7.5	15	15	18.5	32	ATS22D32S6	Size A
11	22	22	30	47	ATS22D47S6	Size A
15	30	30	37	62	ATS22D62S6	Size B
18.5	37	37	45	75	ATS22D75S6	Size B
22	45	45	55	88	ATS22D88S6	Size B
30	55	55	75	110	ATS22C11S6	Size C
37	75	75	90	140	ATS22C14S6	Size C
45	90	90	110	170	ATS22C17S6	Size C
55	110	110	132	210	ATS22C21S6	Size D
75	132	132	160	250	ATS22C25S6	Size D
90	160	160	220	320	ATS22C32S6	Size D
110	220	220	250	410	ATS22C41S6	Size D
132	250	250	315	480	ATS22C48S6	Size E
160	315	355	400	590	ATS22C59S6	Size E

The Altistart 22 soft start/soft stop unit is also available with a 110 VDC control power supply, reference ATS22...S6U

Altistart 48

4...900 kW

2...1200 HP

Pumping and ventilation machines Soft start/soft stop units

Dimensions (in mm)	width x height x depth
ATS48 D17Q to D47Q	Size A: 160 x 275 x 190
D62Q to C11Q	Size B: 190 x 290 x 235
C14Q to C17Q	Size C: 200 x 340 x 265
C21Q to C32Q	Size D: 320 x 380 x 265
C41Q to C66Q	Size E: 400 x 670 x 300
C79Q to M12Q	Size F: 770 x 890 x 315



Supply voltage

Type of application

Starter control supply voltage

Protection Degree of protection

IP20: ATS48D17● to ATS48C11● starters

IP00: ATS48C14● to ATS48M12● starters

Motor thermal protection

Class 10 On all starters

Class 20 and 30

EMC Class A

On all starters up to 170 A

Starting mode

Torque control (patented TCS: Torque Control System)

I/O Analog inputs

1 PTC probe

Logic inputs

4 logic inputs, 2 of which are configurable

Logic outputs

2 configurable logic outputs

Analog outputs

1 analog output

Relay outputs

3 relay outputs, 2 of which are configurable

Dialogue

Integrated

Integrated or remote display terminal (in option), PowerSuite software workshop

Communication Modbus

As an option

DeviceNet, Ethernet, Fipio, PROFIBUS DP

Motor power

230 V kW	400 V kW	Nominal current (I _{cL})				
3	5.5	12 A	–	ATS48D17Q	Size A	
4	7.5	17 A	ATS48D17Q	Size A	ATS48D22Q	Size A
5.5	11	22 A	ATS48D22Q	Size A	ATS48D32Q	Size A
7.5	15	32 A	ATS48D32Q	Size A	ATS48D38Q	Size A
9	18.5	38 A	ATS48D38Q	Size A	ATS48D47Q	Size A
11	22	47 A	ATS48D47Q	Size A	ATS48D62Q	Size B
15	30	62 A	ATS48D62Q	Size B	ATS48D75Q	Size B
18.5	37	75 A	ATS48D75Q	Size B	ATS48D88Q	Size B
22	45	88 A	ATS48D88Q	Size B	ATS48C11Q	Size B
30	55	110 A	ATS48C11Q	Size B	ATS48C14Q	Size C
37	75	140 A	ATS48C14Q	Size C	ATS48C17Q	Size C
45	90	170 A	ATS48C17Q	Size C	ATS48C21Q	Size D
55	110	210 A	ATS48C21Q	Size D	ATS48C25Q	Size D
75	132	250 A	ATS48C25Q	Size D	ATS48C32Q	Size D
90	160	320 A	ATS48C32Q	Size D	ATS48C41Q	Size E
110	220	410 A	ATS48C41Q	Size E	ATS48C48Q	Size E
132	250	480 A	ATS48C48Q	Size E	ATS48C59Q	Size E
160	315	590 A	ATS48C59Q	Size E	ATS48C66Q	Size E
–	355	660 A	ATS48C66Q	Size E	ATS48C79Q	Size F
220	400	790 A	ATS48C79Q	Size F	ATS48M10Q	Size F
250	500	1000 A	ATS48M10Q	Size F	ATS48M12Q	Size F
355	630	1200 A	ATS48M12Q	Size F	–	–

(1) Possible to connect the starter in the motor delta connection

(2) Starting time greater than 30 seconds (fans, high inertia machines and compressors)

Soft start/soft stop units

Dimensions (in mm)		width x height x depth
ATS48	D17Y to D47Y	Size A: 160 x 275 x 190
	D62Y to C11Y	Size B: 190 x 290 x 235
	C14Y to C17Y	Size C: 200 x 340 x 265
	C21Y to C32Y	Size D: 320 x 380 x 265
	C41Y to C66Y	Size E: 400 x 670 x 300
	C79Y to M12Y	Size F: 770 x 890 x 315



Supply voltage													Three-phase 208...690 V ⁽¹⁾	
													Standard	
Type of application													Severe (2)	
Starter control supply voltage													110...230 V	
Characteristics													Identical to 230...415 V starters	
Motor power													Nominal current (I _{CL})	
208 V	230 V	460 V	575 V	230 V	400 V	440 V	500 V	525 V	660 V	690 V	kW		12 A	–
HP													ATS48D17Y	Size A
2	3	7.5	10	3	5.5	5.5	7.5	7.5	9	11			ATS48D22Y	Size A
3	5	10	15	4	7.5	7.5	9	9	11	15			ATS48D32Y	Size A
5	7.5	15	20	5.5	11	11	11	11	15	18.5			ATS48D38Y	Size A
7.5	10	20	25	7.5	15	15	18.5	18.5	22	22			ATS48D47Y	Size A
10	–	25	30	9	18.5	18.5	22	22	30	30			ATS48D62Y	Size B
–	15	30	40	11	22	22	30	30	37	37			ATS48D75Y	Size B
15	20	40	50	15	30	30	37	37	45	45			ATS48C11Y	Size B
20	25	50	60	18.5	37	37	45	45	55	55			ATS48C14Y	Size C
25	30	60	75	22	45	45	55	55	75	75			ATS48C17Y	Size C
30	40	75	100	30	55	55	75	75	90	90			ATS48C21Y	Size D
40	50	100	125	37	75	75	90	90	110	110			ATS48C25Y	Size D
50	60	125	150	45	90	90	110	110	132	160			ATS48C32Y	Size D
60	75	150	200	55	110	110	132	132	160	200			ATS48C41Y	Size E
75	100	200	250	75	132	132	160	160	220	250			ATS48C48Y	Size E
100	125	250	300	90	160	160	220	220	250	315			ATS48C59Y	Size E
125	150	300	350	110	220	220	250	250	355	400			ATS48C66Y	Size E
150	–	350	400	132	250	250	315	315	400	500			ATS48C79Y	Size F
–	200	400	500	160	315	355	400	400	560	560			ATS48M10Y	Size F
200	250	500	600	–	355	400	–	–	630	630			ATS48M12Y	Size F
250	300	600	800	220	400	500	500	500	710	710			–	
350	350	800	1000	250	500	630	630	630	900	900				
400	455	1000	1200	355	630	710	800	800	–	–				

(1) Starter connection in the motor delta connection: up to 500 V only, add "S316" at the end of the reference

(2) Starting time greater than 30 seconds (fans, high inertia machines and compressors)

Altivar 12

0.18...4 kW

0.25...5 HP

Simple machines
Ultra-compact drives



Dimensions (in mm)		width x height x depth
1C1:	72 x 143 x 102.2	2F3: 105 x 143 x 131.2
1C2:	72 x 143 x 102.2	3F3: 140 x 184 x 141.2
1C3:	72 x 143 x 121.2	
2C1:	105 x 142 x 156.2	
2C2:	105 x 142 x 156.2	

Type of drive	Single-phase 120 V	Single-phase 240 V	Three-phase 240 V		
Supply voltage					
Degree of protection	IP20				
Drive	Output frequency Type of control Asynchronous motor Transient overtorque	0.5... 400 Hz U/F, sensorless flux vector control, quadratic U/F 150...170			
Speed range		1 to 20			
Functions	Number of functions Number of preset speeds Number of I/O	40 8 Analog inputs Logic inputs Analog outputs Relay outputs	1 configurable analog input 4 assignable logic inputs 1 configurable analog output 1 protected relay logic output		
Dialogue		Integrated or remote display terminal, SoMove software workshop, or mobile phone via Bluetooth®			
Communication	Integrated	Modbus			
Cards (available as an option)					
Reduction of current harmonics					
EMC filter	Integrated As an option	C1 EMC			
Motor power	kW/HP	ATV12H018F1 (1) ATV12H037F1 ATV12H055M2 (2) ATV12H075F1 ATV12H037M2 (2) ATV12H055M2 (2) ATV12H075M2 (2) ATV12HU15M2 (2) ATV12HU22M2 (2) ATV12HU30M3 ATV12HU40M3	1C1 1C1 1C2 2C1 1C1 1C2 1C2 2C2 2C2 3F3 3F3	ATV12H018M3 (1) ATV12H037M3 – ATV12H075M3 ATV12HU15M3 ATV12HU22M3 – ATV12HU30M3 ATV12HU40M3	1C3 1C3 – 1C3 1C3 1C3 1C3 2F3 2F3 3F3 3F3

(1) Because of the low heat dissipation, the ATV12H018.. is only supplied on a base plate

(2) Also exists as a multipack

Altivar 212

0.75...75 kW

1...100 HP

Building Drives for HVAC applications

Dimensions (in mm)	width x height x depth
IP21	IP55
T1A: 107 x 143 x 150	T1: 215 x 297 x 192
T2A: 142 x 184 x 150	T2: 230 x 340 x 208
T3A: 180 x 232 x 170	T3: 290 x 560 x 315
T4A: 245 x 329.5 x 190	T4: 310 x 665 x 315
T5A: 240 x 420 x 214	T5: 284 x 720 x 315
T6A: 320 x 630 x 290	T5: 284 x 880 x 343
T7A: 240 x 550 x 266	T5: 362 x 1000 x 364
T8A: 320 x 630 x 290	



Type of drive	Three-phase	IP21 200...240 V	380...480 V	IP55 380...480 V		
Supply voltage						
Degree of protection		IP21 and IP41 on the upper part		IP55 drive available in two manufacturing variants, ATV212W...N4 C1 EMC or ATV212W...N4C C2 EMC		
Output frequency		0.5...200 Hz				
Type of control		Kn ² quadratic ratio, sensorless flux vector control, voltage/frequency ratio (2 points), energy saving ratio				
Speed range		1 to 10				
I/O	Analog inputs	1 switch-configurable current or voltage analog input and 1 voltage analog input, configurable as a PTC probe input				
	Logic inputs	3 programmable logic inputs				
	Analog outputs	1 switch-configurable current or voltage analog output				
	Relay outputs	2 relay logic outputs				
Dialogue		Integrated display terminal with local controls (1) or remote display terminal or PC software (3)				
Communication	Integrated	Modbus, APOGEE FLN P1, Metasys N2, BACnet				
(see page 4/11)	As an option	LonWorks				
EMC filter	Integrated	–	C2 EMC	C2 EMC		
	Available as an option	C2 EMC	C1 EMC	–		
Motor power	kW/HP	0.75/1	ATV212H075M3X T1A	ATV212H075N4 T1A	ATV212W075N4 T1	ATV212W075N4C T1
		1.5/2	ATV212HU15M3X T1A	ATV212HU15N4 T1A	ATV212WU15N4 T1	ATV212WU15N4C T1
		2.2/3	ATV212HU22M3X T1A	ATV212HU22N4 T1A	ATV212WU22N4 T1	ATV212WU22N4C T1
		3/–	ATV212HU30M3X T2A	ATV212HU30N4 T2A	ATV212WU30N4 T2	ATV212WU30N4C T2
		4/5	ATV212HU40M3X T2A	ATV212HU40N4 T2A	ATV212WU40N4 T2	ATV212WU40N4C T2
		5.5/7.5	ATV212HU55M3X T3A	ATV212HU55N4 T2A	ATV212WU55N4 T2	ATV212WU55N4C T2
		7.5/10	ATV212HU75M3X T3A	ATV212HU75N4 T3A	ATV212WU75N4 T2	ATV212WU75N4C T2
		11/15	ATV212HD11M3X T4A	ATV212HD11N4 T3A	ATV212WD11N4 T3	ATV212WD11N4C T3
		15/20	ATV212HD15M3X T4A	ATV212HD15N4 T4A	ATV212WD15N4 T3	ATV212WD15N4C T3
		18.5/25	ATV212HD18M3X T4A	ATV212HD18N4 T4A	ATV212WD18N4 T4	ATV212WD18N4C T4
		22/30	–	ATV212HD22N4S T4A	–	–
		22/30	ATV212HD22M3X T5A	ATV212HD22N4(2) T5A	ATV212WD22N4 T5	ATV212WD22N4C T5
		30/40	ATV212HD30M3X T6A	ATV212HD30N4(2) T5A	ATV212WD30N4 T5	ATV212WD30N4C T5
		37/50	–	ATV212HD37N4 T7A	ATV212WD37N4 T6	ATV212WD37N4C T6
		45/60	–	ATV212HD45N4 T7A	ATV212WD45N4 T6	ATV212WD45N4C T6
		55/75	–	ATV212HD55N4 T8A	ATV212WD55N4 T7	ATV212WD55N4C T7
		75/100	–	ATV212HD75N4 T8A	ATV212WD75N4 T7	ATV212WD75N4C T7

(1) Drive with local controls, Run/Stop, Loc/Rem. keys

(2) For references ATV212HD22N4 and ATV212HD30N4, please refer to the Schneider Electric catalogue.

(3) PC Software is available as a free download from www.schneider-electric.com

Altivar 312

0.18...15 kW

0.25...20 HP

Simple industrial machines
High performance drives

Dimensions (in mm)		width x height x depth
T 1:	72 x 145 x 122	T 6: 107 x 143 x 152
T 2:	72 x 145 x 132	T 7: 142 x 184 x 152
T 3:	72 x 145 x 132	T 8: 180 x 232 x 172
T 4:	72 x 145 x 142	T 9: 245 x 330 x 192
T 5:	105 x 143 x 132	



Type of drive	Single-phase 240 V	Three-phase 240 V	Three-phase 500V	Three-phase 600V					
Supply voltage	with integrated EMC filters	without EMC filter	with integrated EMC filters	without EMC filter					
Degree of protection	IP20								
Drive	Output frequency Type of control Asynchronous motor								
	0.5...500 Hz Standard (voltage / frequency) - Performance (sensorless flux vector control) Energy saving ratio								
Speed range	Transient overtorque 170 ... 200% of the nominal motor torque								
Functions	Number of functions Number of preset speeds Number of I/O Analog inputs Logic inputs Analog outputs Logic outputs Relay outputs								
Dialogue	Integrated 4-digit display, remote terminals (IP54 or IP65), Altivar 61/71 remote graphic display terminal								
Communication	Integrated Modbus and CANopen As an option CANopen Daisy chain, Modbus TCP, DeviceNet, PROFIBUS DP, Fipio								
Reduction of current harmonics									
EMC filter	Integrated C2 EMC	External as an option	Integrated C2(1) or C3 EMC	External as an option					
	As an option C1 EMC	—	—	—					
Motor power	kW/HP	0.18/0.25	ATV312H018M2	T3	ATV312H018M3	T1	—	—	—
		0.37/0.5	ATV312H037M2	T3	ATV312H037M3	T1	ATV312H037N4	T5	—
		0.55/0.75	ATV312H055M2	T4	ATV312H055M3	T2	ATV312H055N4	T5	—
		0.75/1	ATV312H075M2	T4	ATV312H075M3	T2	ATV312H075N4	T6	ATV312H075S6 T6
		1.1/1.5	ATV312HU11M2	T6	ATV312HU11M3	T5	ATV312HU11N4	T6	—
		1.5/2	ATV312HU15M2	T6	ATV312HU15M3	T5	ATV312HU15N4	T6	ATV312HU15S6 T6
		2.2/3	ATV312HU22M2 (2)	T7	ATV312HU22M3	T6	ATV312HU22N4	T7	ATV312HU22S6 T7
		3/-	—		ATV312HU30M3	T7	ATV312HU30N4	T7	—
		4/5	—		ATV312HU40M3	T7	ATV312HU40N4	T7	ATV312HU40S6 T7
		5.5/7.5	—		ATV312HU55M3	T8	ATV312HU55N4	T8	ATV312HU55S6 T8
		7.5/10	—		ATV312HU75M3	T8	ATV312HU75N4	T8	ATV312HU75S6 T8
		11/15	—		ATV312HD11M3	T9	ATV312HD11N4	T9	ATV312HD11S6 T9
		15/20	—		ATV312HD15M3	T9	ATV312HD15N4	T9	ATV312HD15S6 T9

(1) C2 up to 4 kW

(2) Supplied with integrated C3 EMC filter

Altivar 31C

0.18...15 kW

0.25...20 HP

Simple machines Enclosed IP55 drives



Dimensions (in mm)	width x height x depth
Size 1: 210 x 240 x 163	/ Size 2: 215 x 297 x 192
Size 3: 230 x 340 x 208	/ Size 4: 320 x 512 x 282
Size 5: 440 x 625 x 282	

Supply voltage		Single-phase 200...240 V	Three-phase 380...500 V	
Degree of protection		IP55		
Description		Enclosure equipped with an Altivar 31 drive with external heatsink. Removable covers for adding 1 switch-disconnector or 1 circuit-breaker, 3 buttons and/or LEDs, 1 potentiometer		
Motor power	kW/HP			
	0.18/0.25	ATV31C018M2	Size 1	
	0.37/0.5	ATV31C037M2	Size 1	
	0.55/0.75	ATV31C055M2	Size 1	
	0.75/1	ATV31C075M2	Size 1	
	1.1/1.5	ATV31CU11M2	Size 2	
	1.5/2	ATV31CU15M2	Size 2	
	2.2/3	ATV31CU22M2	Size 3	
	3/–	–	ATV31CU30N4	
	4/5	–	ATV31CU40N4	
	5.5/7.5	–	ATV31CU55N4 (1)	
	7.5/10	–	ATV31CU75N4 (1)	
	11/15	–	ATV31CD11N4 (1)	
	15/20	–	ATV31CD15N4 (1)	

(1) Drive in metal enclosure without cover.

3

Altivar 32

0.18...15 kW

0.25...20 HP

Complex machines Compact drives

Dimensions (in mm)	width x height x depth
T1: 45 x 317 x 245	
T2: 60 x 317 x 245	
T4: 150 x 308 x 232 (EMC plate installed)	
T4: 150 x 232 x 232 (EMC plate not installed)	
T5: 180 x 404 x 232 (EMC plate installed)	
T5: 180 x 330 x 232 (EMC plate not installed)	



Type of drive	Single-phase 240 V with integrated EMC filter	Three-phase 500 V with integrated EMC filter
Degree of protection	IP20	
Drive	Output frequency Type of control Asynchronous motor Standard (voltage/frequency) Performance (sensorless flux vector control) Pump/fan (Kn^2 quadratic ratio) Energy saving ratio	0.1...599 Hz
	Synchronous motor Profile for open loop synchronous motor	
	Transient overtorque 170...200% of the nominal motor torque	1 to 50
Speed range		
Functions	Number of functions Number of I/O	150
	Analog inputs Logic inputs Analog outputs Logic outputs Relay outputs	3 - Response time : 3ms, resolution 10 bits 6 - Response time : 8 ms, configurable in PTC and IN pwm 1 - Updating time : 2 ms 1 - Sampling time : 2 ms, configurable as voltage (0-10 V) or current (0-20 mA) 2
Dialogue		4-digit display, remote display terminal (IP54 or IP55), remote graphic display terminal, SoMove setup software and SoMove Mobile application for mobile phone.
Communication	Integrated As an option	Modbus and CANopen - Bluetooth® link DeviceNet, PROFIBUS DP V1, EtherNet/IP, Modbus TCP, EtherCat
Reduction of current harmonics		
EMC filter	Integrated As an option	C2 EMC C1 EMC
Motor power	kW HP	
	0.18 1/4	ATV32H018M2 T1
	0.37 1/2	ATV32H037M2 T1
	0.55 3/4	ATV32H055M2 T1
	0.75 1	ATV32H075M2 T1
	1.1 11/2	ATV32HU11M2 T2
	1.5 2	ATV32HU15M2 T2
	2.2 3	ATV32HU22M2 T2
	3 -	-
	4 5	-
	5.5 71/2	-
	7.5 10	-
	11 15	-
	15 20	-

Notes

3

Dimensions (in mm)	width x height x depth
T2 : 130 x 230 x 175	T3 : 155 x 260 x 187
T4 : 175 x 295 x 187	T5A : 210 x 295 x 213
T5B : 230 x 400 x 213	T6 : 240 x 420 x 236
T7A : 240 x 550 x 266	T7B : 320 x 550 x 266
T8 : 320 x 630 x 290	T9 : 320 x 920 x 377
T10 : 360 x 1022 x 377	T11 : 340 x 1190 x 377
T12 : 440 x 1190 x 377	T13 : 595 x 1190 x 377
T14 : 890 x 1390 x 377	T15 : 1120 x 1390 x 377



Type of drive	Supply voltage		Single-phase 200...240 V	Three-phase 200...240 V	Three-phase 380...480 V
Degree of protection			IP20 for unprotected drives and IP41 on the upper part		
Drive	Output frequency		0.1...599 Hz up to 37 kW; 0.1...500 Hz from 45 to 800 kW		
	Type of control	Asynchronous motor	Kn ² quadratic ratio, flux vector control with or without sensor, voltage/frequency ratio (2 or 5 points), energy saving ratio		
		Synchronous motor	Vector control without speed feedback		
	Transient overtorque		120...130% of the nominal drive current for 60 seconds		
Speed range			1...100 in open loop mode		
Functions	Number of functions		> 150		
	Number of preset speeds		16		
	Number of I/O		Analog inputs 2...4/Logic inputs 6...20 Analog outputs 1...3/Logic outputs 0...8 Relay outputs 2...4 Safety input 1		
Dialogue			Remote graphic display terminal, SoMove setup software (3)		
Communication	Integrated		Modbus and CANopen		
	As an option		HVAC protocols: LonWorks, BACnet, METASYS N2, APOGEE FLN P1 Industrial protocols: Modbus TCP Daisy Chain, Modbus/Uni-Telway, EtherNet/IP, EtherCAT, DeviceNet, PROFIBUS DP V0 and V1, INTERBUS, CC-Link		
Cards (available as an option)			Multi-pump cards, I/O extension cards, "Controller Inside" programmable card		
Reduction of current harmonics			DC choke integrated or supplied with the drive or AFE Altivar (Active Front End)		
EMC filter	Integrated	C2 EMC	C2 EMC up to 7.5 kW	C2 EMC up to 4 kW C3 EMC from 5.5 to 630 kW	
	As an option	C1 EMC	C1 EMC	C1 EMC from 0.75 to 630 kW	
Motor power	kW/HP	0.37/0.5	ATV61H075M3	T2	—
		0.75/1	ATV61HU15M3	T2	ATV61H075N4
		1.5/2	ATV61HU22M3	T3	ATV61HU15N4
		2.2/3	ATV61HU30M3	T3	ATV61HU22N4
		3/—	ATV61HU40M3 (1)	T3	ATV61HU30N4
		4/5	ATV61HU55M3 (1)	T4	ATV61HU40N4
		5.5/7.5	ATV61HU75M3 (1)	T5A	ATV61HU55N4
		7.5/10	—	ATV61HU75M3	T4
		11/15	—	ATV61HD11M3X(2)	T5B
		15/20	—	ATV61HD15M3X(2)	T5B
		18.5/25	—	ATV61HD18M3X(2)	T6
		22/30	—	ATV61HD22M3X(2)	T6
		30/40	—	ATV61HD30M3X(2)	T7B
		37/50	—	ATV61HD37M3X(2)	T7B
		45/60	—	ATV61HD45M3X(2)	T7B
		55/75	—	ATV61HD55M3X(2)	T9
		75/100	—	ATV61HD75M3X(2)	T9
		90/125	—	ATV61HD90M3X(2)	T10
		110/150	—	—	ATV61HC11N4
		132/200	—	—	ATV61HC13N4
		160/250	—	—	ATV61HC16N4
		220/350	—	—	ATV61HC22N4
		250/400	—	—	ATV61HC25N4
		315/500	—	—	ATV61HC31N4
		400/600	—	—	ATV61HC40N4
		500/700	—	—	ATV61HC50N4
		630/900	—	—	ATV61HC63N4

(1) Must be used with a line choke, refer to the Schneider Electric catalogue.

(2) Drive supplied without EMC filter

(3) SoMove setup software : available from 2011. Altivar 61 is also supported by Powersuite software workshop.

For all other variants, please refer to the Schneider Electric catalogue.

Dimensions (in mm)	width x height x depth
T6	240 x 420 x 236
T8	320 x 630 x 290
T11	340 x 1190 x 377
T13	595 x 1190 x 377
T15	1120 x 1390 x 377



Type of drive	Three-phase				
Supply voltage	500...690 V				
Degree of protection	IP20 and IP41 on the upper part				
Drive	Output frequency Type of control Asynchronous motor Synchronous motor Transient overtorque				
Speed range	120...130% of the nominal drive current for 60 seconds				
Functions	Number of functions Number of preset speeds Number of I/O				
Dialogue	1...100 in open loop mode				
Communication	Integrated As an option				
Cards (available as an option)	HVAC protocols: LonWorks, BACnet, METASYS N2, APOGEE FLN P1 Industrial protocols: Modbus TCP Daisy Chain, Modbus/Uni-Telway, EtherNet/IP, EtherCAT, DeviceNet, PROFIBUS DP V0 et V1, INTERBUS, CC-Link Multi-pump cards, I/O extension cards, "Controller Inside" programmable card				
Reduction of current harmonics	DC choke integrated or supplied with the product or AFE Altivar (Active Front End)				
EMC filter	C3 EMC				
Motor power	kW/HP	500 V Kw	575 V HP	690 V kW	
		2.2	3	3	ATV61HU30Y T6
		3	–	4	ATV61HU40Y T6
		4	5	5.5	ATV61HU55Y T6
		5.5	7.5	7.5	ATV61HU75Y T6
		7.5	10	11	ATV61HD11Y T6
		11	15	15	ATV61HD15Y T6
		15	20	18.5	ATV61HD18Y T6
		18.5	25	22	ATV61HD22Y T6
		22	30	30	ATV61HD30Y T6
		30	40	37	ATV61HD37Y T8
		37	50	45	ATV61HD45Y T8
		45	60	55	ATV61HD55Y T8
		55	75	75	ATV61HD75Y T8
		75	100	90	ATV61HD90Y T8
		90	125	110	ATV61HC11Y T11
		110	150	132	ATV61HC13Y T11
		132	–	160	ATV61HC16Y T11
		160	200	200	ATV61HC20Y T11
		200	250	250	ATV61HC25Y T13
		250	350	315	ATV61HC31Y T13
		315	450	400	ATV61HC40Y T13
		400	550	500	ATV61HC50Y T15
		500	700	630	ATV61HC63Y T15
		630	800	800	ATV61HC80Y T15

(1) SoMove setup software : available from 2011. Altivar 61 is also supported by Powersuite software workshop.

For all other variants, please refer to the Schneider Electric catalogue.

Altivar 61

0.75...90 kW

1...125 HP

Pumping and ventilation machines IP54 drives

Dimensions (in mm)		width x height x depth
ATV61W...		
TA2 : 235 x 490 x 272	TD : 310 x 665 x 315	
TA3 : 235 x 490 x 286	TE : 284 x 720 x 315	
TB : 255 x 525 x 286	TF : 284 x 880 x 343	
TC : 290 x 560 x 315	TG : 362 x 1000 x 364	



Type of drive		Three-phase 380...480 V						
Degree of protection		Type 12 (1) / IP54						
Drive	Output frequency	0.1...599 Hz up to 37 kW; 0.1...500 Hz from 45 to 800 kW						
	Type of control	Asynchronous motor	Kn ² quadratic ratio, flux vector control with or without sensor, voltage/frequency ratio (2 or 5 points), energy saving ratio					
		Synchronous motor	Vector control without speed feedback					
	Transient overtorque	120...130% of the nominal drive current for 60 seconds						
Speed range		1...100 in open loop mode						
Functions	Number of functions	> 150						
	Number of preset speeds	16						
	Number of I/O	Analog inputs 2...4/Logic inputs 6...20						
		Analog outputs 1...3/Logic outputs 0...8						
Dialogue		Relay outputs 2...4						
Communication		Safety input 1						
Cards (available as an option)		Remote graphic display terminal, SoMove setup software (2)						
Reduction of current harmonics		Modbus and CANopen						
EMC filter	Integrated	HVAC protocols: LonWorks, BACnet, METASYS N2, APOGEE FLN P1						
	As an option	Industrial protocols: Modbus TCP Daisy Chain, Modbus/Uni-Telway, EtherNet/IP, EtherCAT, DeviceNet, PROFIBUS DP V0 and V1, INTERBus, CC-Link						
Motor power		Multi-pump cards, I/O extension cards, "Controller Inside" programmable card						
EMC filter		Integrated DC choke						
Motor power	kW/HP	Integrated	C2 EMC					
		As an option	–	–				
	0.75/1	ATV61W075N4	TA2	ATV61E5075N4	TA2			
	1.5/2	ATV61WU15N4	TA2	ATV61E5U15N4	TA2			
	2.2/3	ATV61WU22N4	TA2	ATV61E5U22N4	TA2			
	3/–	ATV61WU30N4	TA3	ATV61E5U30N4	TA3			
	4/5	ATV61WU40N4	TA3	ATV61E5U40N4	TA3			
	5.5/7.5	ATV61WU55N4	TB	ATV61E5U55N4	TB			
	7.5/10	ATV61WU75N4	TB	ATV61E5U75N4	TB			
	11/15	ATV61WD11N4	TC	ATV61E5D11N4	TC			
	15/20	ATV61WD15N4	TD	ATV61E5D15N4	TD			
	18.5/25	ATV61WD18N4	TD	ATV61E5D18N4	TD			
	22/30	ATV61WD22N4	TE	ATV61E5D22N4	TE			
	30/40	ATV61WD30N4	TF	ATV61E5D30N4	TF			
	37/50	ATV61WD37N4	TF	ATV61E5D37N4	TF			
	45/60	ATV61WD45N4	TG	ATV61E5D45N4	TG			
	55/75	ATV61WD55N4	TG	ATV61E5D55N4	TG			
	75/100	ATV61WD75N4	TG	ATV61E5D75N4	TG			
	90/125	ATV61WD90N4	TG	ATV61E5D90N4	TG			

Drive with integrated C1 filter: add the letter **C** at the end of the reference For example, ATV61W075N4 becomes ATV61W075N4C

For other variants, please refer to the Schneider Electric catalogue.

(1) For ATV61W... range only.

(2) SoMove setup software : available from 2011. Altivar 61 is also supported by Powersuite software workshop.

Altivar 61Q

110...800 kW

150...900 HP

Pumping and ventilation machines
Water-cooled drives for harsh environments



Dimensions (in mm)		width x height x depth
T11	: 330 x 950 x 377	
T13	: 585 x 950 x 377	
T15	: 1110 x 1150 x 377	

Type of drive	Three-phase	Three-phase
Supply voltage	380...480 V	500...690 V
Degree of protection	Sideways and front IP31 - Top IP20 - Bottom IP00	
Drive	Output frequency Type of control Asynchronous motor Synchronous motor Transient overtorque	0.1...500Hz Kn ² quadratic ratio, flux vector control with or without sensor, voltage/frequency ratio (2 or 5 points), energy saving ratio Vector control without speed feedback 120...130% of the nominal drive current for 60 seconds
Speed range		1...100 in open loop mode
Functions	Number of functions Number of preset speeds Number of I/O	> 150 16 Analog inputs 2...4/Logic inputs 6...20 Analog outputs 1...3/Logic outputs 0...8 Relay outputs 2...4 Safety input 1
Dialogue		Remote graphic display terminal, SoMove setup software (2)
Communication	Integrated As an option	Modbus and CANopen HVAC protocols: LonWorks, BACnet, METASYS N2, APOGEE FLN P1 Industrial protocols: Modbus TCP, Modbus/Uni-Telway, Fipio, Modbus Plus, Profbus DP, Profbus DP V1, DeviceNet, EthernetIP, CC-Link, INTERBUS
Cards (available as an option)		Multi-pump cards, I/O extension cards, "Controller Inside" programmable card
Reduction of current harmonics		Optional AC choke, Altivar AFE (Active Front End)
EMC filter	Integrated As an option	C3 EMC C1 EMC
Motor power	kW/HP	110/150 132/200 160/250 200/300 250/400 315/500 400/600 500/700 630/900
		ATV61QC11N4 T11 ATV61QC13N4 T11 ATV61QC16N4 T11 ATV61QC20N4 T13 ATV61QC25N4 T13 ATV61QC31N4 T13 ATV61QC40N4 T15 ATV61QC50N4 T15 ATV61QC63N4 T15

500 V kW	575 V HP	690 V kW		
110	150	132	—	ATV61QC13Y T11
132	—	160	—	ATV61QC16Y T11
160	200	200	—	ATV61QC20Y T11
200	250	250	—	ATV61QC25Y T13
250	350	315	—	ATV61QC31Y T13
315	450	400	—	ATV61QC40Y T13
400	550	500	—	ATV61QC50Y T15
500	700	630	—	ATV61QC63Y T15
630	800	800	—	ATV61QC80Y T15

(1) SoMove setup software : available during 2011. Altivar 61 also works with the PowerSuite software workshop.



Type of card	I/O extension Logic	Extended
Description	1 relay logic output ("C/O" contact) 4 x 24 VDC positive or negative logic inputs 2 x 24 VDC open collector positive or negative logic outputs 1 input for PTC probes	1 x 0...20 mA differential current analog input 1 software-configurable voltage (0...10 VDC) or current (0...20 mA) analog input 2 software-configurable voltage (\pm 10V, 0...10 VDC) or current (0...20 mA) analog inputs 1 relay logic output ("C/O" contact) 4 x 24 VDC positive or negative logic inputs 2 x 24 VDC open collector positive or negative logic outputs 1 input for PTC probes 1 frequency control input
Reference	VW3A3201	VW3A3202

"Controller Inside" programmable card



Type of card	Programmable "Controller Inside"
Description	10 logic inputs, 2 of which can be used for 2 counters or 4 of which can be used for 2 incremental encoders 2 analog inputs, 6 logic outputs, 2 analog outputs, a master port for the CANopen bus, a PC port for programming with the PS 1131 software workshop.
Reference	VW3A3501

Multi-pump cards



Type of card	Multi-pump
Description	The pump switching card ensures compatibility of applications developed on the Altivar 38.
Reference	VW3A3502

Description	The VWA3503 "Water Solution" card can be used to support all multi-pump applications.
Reference	VW3A3503

Notes

3

Altivar 71

0.37...630 kW

0.5...700 HP

Complex, high-power machines
High performance drives

Dimensions (in mm)		width x height x depth
T2	: 130 x 230 x 175	T3 : 155 x 260 x 187
T4	: 175 x 295 x 187	T5A : 210 x 295 x 213
T5B	: 230 x 400 x 213	T6 : 240 x 420 x 236
T7A	: 240 x 550 x 266	T7B : 320 x 550 x 266
T8	: 320 x 630 x 290	T9 : 320 x 920 x 377
T10	: 360 x 1022 x 377	T11 : 340 x 1190 x 377
T12	: 440 x 1190 x 377	T13 : 595 x 1190 x 377
T14	: 890 x 1390 x 377	T15 : 1120 x 1390 x 377



Type of drive	Single-phase	Three-phase	Three-phase
Supply voltage	200...240 V (3)	200...240 V (3)	380...480 V (3)
Degree of protection	IP20 for unprotected drives and IP41 on the upper part		
Drive	Output frequency Type of control Asynchronous motor Synchronous motor Transient overtorque		
Speed range	1...1000 in closed loop mode with encoder feedback, 1...100 in open loop mode		
Functions	Number of functions Number of preset speeds Number of I/O Analog inputs Logic inputs Analog outputs Logic outputs Relay outputs Safety input		
Dialogue	Remote graphic display terminal, SoMove setup software (5)		
Communication	Integrated As an option		
Cards (available as an option)	Encoder interface cards, I/O extension cards, "Controller Inside" programmable card		
Reduction of current harmonics	DC choke integrated or supplied with the product or Altivar AFE (Active Front End).		
EMC filter	Integrated As an option		
Motor power	kW/HP	0.37/0.5	ATV71H075M3 T2
		0.75/1	ATV71HU15M3 T2
		1.5/2	ATV71HU22M3 T3
		2.2/3	ATV71HU30M3 T3
		3/–	ATV71HU40M3 (1) T3
		4/5	ATV71HU55M3 (1) T4
		5.5/7.5	ATV71HU75M3 (1) T5A
		7.5/10	ATV71HU75M3 T5A
		11/15	ATV71HD11M3X (2) T5B
		15/20	ATV71HD15M3X (2) T5B
		18.5/25	ATV71HD18M3X (2) T6
		22/30	ATV71HD22M3X (2) T6
		30/40	ATV71HD30M3X (2) T7B
		37/50	ATV71HD37M3X (2) T7B
		45/60	ATV71HD45M3X (2) T7B
		55/75	ATV71HD55M3X (2) T9
		75/100	ATV71HD75M3X (2) T10
		90/125	–
		110/150	–
		132/200	–
		160/250	–
		200/300	–
		220/350	–
		280/450	–
		315/500	–
		355/–	–
		500/700	–

(1) Must be used with a line choke. Refer to the Schneider Electric catalogue.

(2) Drive supplied without EMC filter.

(3) A three-phase 380...480 V range on base plate is available from 0.75 to 11 kW. Please refer to the Schneider Electric catalogue.

(4) Vector control with speed feedback for synchronous motors is supported by the S383 variant of the Altivar 71.

(5) SoMove setup software : available from 2011. Altivar 71 is also supported by Powersuite software workshop.

Altivar 71

0.37...630 kW

0.5...700 HP

Complex, high-power machines
High performance drives



Dimensions (in mm)		width x height x depth
T2	: 130 x 230 x 175	T3 : 155 x 260 x 187
T4	: 175 x 295 x 187	T5A : 210 x 295 x 213
T5B	: 230 x 400 x 213	T6 : 240 x 420 x 236
T7A	: 240 x 550 x 266	T7B : 320 x 550 x 266
T8	: 320 x 630 x 290	T9 : 320 x 920 x 377
T10	: 360 x 1022 x 377	T11 : 340 x 1190 x 377
T12	: 440 x 1190 x 377	T13 : 595 x 1190 x 377
T14	: 890 x 1390 x 377	T15 : 1120 x 1390 x 377

Type of drive

Supply voltage

Three-phase

500... 690 V

Degree of protection

IP20 for unprotected drives and IP41 on the upper part

Drive

Output frequency

0...599 Hz up to 37 kW - 0...500 Hz from 45...630 kW

Type of control

Asynchronous motor

Synchronous motor

Vector control with and without speed feedback (1)

Transient overtorque

220% of nominal motor torque for 2 seconds, and 170% for 60 seconds

Speed range

1...1000 in closed loop mode with encoder feedback, 1...100 in open loop mode

Functions

Number of functions

> 150

Number of preset speeds

16

Number of I/O

Analog inputs

2...4

Logic inputs

6...20

Analog outputs

1...3

Logic outputs

0...8

Relay outputs

2...4

Safety input

1

Dialogue

Remote graphic display terminal, SoMove setup software (2)

Communication

Integrated

Modbus and CANopen

As an option

Modbus TCP, Modbus/Uni-Telway, EtherNet/IP, EtherCAT, DeviceNet, PROFIBUS DP V0 and V1, INTERBUS, CC-Link.

Cards (available as an option)

Encoder interface cards, I/O extension cards, "Controller Inside" programmable card

Reduction of current harmonics

DC choke integrated or DC choke optional or AFE Altivar (Active Front End)

EMC filter

Integrated

C3 EMC

Motor power

kW/HP

500 V
kW

575 V
HP

690 V
kW

1.5 2 2.2

ATV71HU22Y

T6

2.2 3 3

ATV71HU30Y

T6

3 – 4

ATV71HU40Y

T6

4 5 5.5

ATV71HU55Y

T6

5.5 7.5 7.5

ATV71HU75Y

T6

7.5 10 11

ATV71HD11Y

T6

11 15 15

ATV71HD15Y

T6

15 20 18.5

ATV71HD18Y

T6

18.5 25 22

ATV71HD22Y

T6

22 30 30

ATV71HD30Y

T6

30 40 37

ATV71HD37Y

T8

37 50 45

ATV71HD45Y

T8

45 60 55

ATV71HD55Y

T8

55 75 75

ATV71HD75Y

T8

75 100 90

ATV71HD90Y

T8

90 125 110

ATV71HC11Y

T11

110 150 132

ATV71HC13Y

T11

132 – 160

ATV71HC16Y

T11

160 200 200

ATV71HC20Y

T13

200 250 250

ATV71HC25Y

T13

250 350 315

ATV71HC31Y

T13

315 450 400

ATV71HC40Y

T15

400 550 500

ATV71HC50Y

T15

500 700 630

ATV71HC63Y

T15

(1) Vector control with speed feedback for synchronous motors is supported by the S383 variant of the Altivar 71.

(2) SoMove setup software : available from 2011. Altivar 71 is also supported by Powersuite software workshop..

For all other variants, please refer to the Schneider Electric catalogue.

Altivar 71

0.75...75 kW

1...100 HP

Complex, high-power machines
IP54 drives

Dimensions (in mm)	width x height x depth
ATV71W..., ATV71E5...	
up to 75 kW	
TA2 : 235 x 490 x 272	TD : 310 x 665 x 315
TA3 : 235 x 490 x 286	TE : 284 x 720 x 315
TB : 255 x 525 x 286	TF : 284 x 880 x 343
TC : 290 x 560 x 315	TG : 362 x 1000 x 364



Type of drive	Three-phase 380...480 V		With switch			
Degree of protection	UL Type 12 (1) / IP54					
Drive	Output frequency Type of control Asynchronous motor Synchronous motor			0...599 Hz up to 37 kW - 0...500 Hz from 45...75 kW Flux vector control with or without sensor, voltage/frequency ratio (2 or 5 points), ENA System Vector control without speed feedback		
Speed range	Transient overtorque			220% of nominal motor torque for 2 seconds, and 170% for 60 seconds		
Functions	Number of functions Number of preset speeds Number of I/O Analog inputs Logic inputs Analog outputs Logic outputs Relay outputs Safety input			1...1000 in closed loop mode with encoder feedback, 1...100 in open loop mode > 150 16 2...4 6...20 1...3 0...8 2...4 1		
Dialogue	Remote graphic display terminal, SoMove setup software (2)					
Communication	Integrated As an option		Modbus and CANopen			
Cards (available as an option)	Encoder interface cards, I/O extension cards, "Controller Inside" programmable card					
Reduction of current harmonics	Optional chokes and passive filters					
EMC filter	Integrated As an option		C2 EMC External C1 EMC			
Motor power	kW/HP	0.75/1	ATV71W075N4	TA2		
		1.5/2	ATV71WU15N4	TA2		
		2.2/3	ATV71WU22N4	TA2		
		3/-	ATV71WU30N4	TA3		
		4/5	ATV71WU40N4	TA3		
		5.5/7.5	ATV71WU55N4	TB		
		7.5/10	ATV71WU75N4	TB		
		11/15	ATV71WD11N4	TC		
		15/20	ATV71WD15N4	TD		
		18.5/25	ATV71WD18N4	TD		
		22/30	ATV71WD22N4	TD		
		30/40	ATV71WD30N4	TF		
		37/50	ATV71WD37N4	TF		
		45/60	ATV71WD45N4	TG		
		55/75	ATV71WD55N4	TG		
		75/100	ATV71WD75N4	TG		

(1) For ATV71W... range only.

(2) SoMove setup software : available from 2011. Altivar 71 is also supported by Powersuite software workshop.

Altivar 71Q

90...630 kW

125...700 HP

Complex, high-power machines
Water-cooled drives for harsh environments

Dimensions (in mm)	width x height x depth
T11	: 330 x 950 x 377
T13	: 585 x 950 x 377
T15	: 1110 x 1150 x 377



Type of drive	Three-phase	Three-phase			
Supply voltage	380...480 V	500...690 V			
Degree of protection	Sideways and front IP31 - Top IP20 - Bottom IP00				
Drive	Output frequency Type of control Asynchronous motor Synchronous motor Transient overtorque	0.1...500Hz Flux vector control with or without sensor, voltage/frequency ratio (2 or 5 points), ENA System Vector control without speed feedback 220% of nominal motor torque for 2 seconds, and 170% for 60 seconds			
Speed range		1...1000 in closed loop mode with encoder feedback, 1...100 in open loop mode			
Functions	Number of functions Number of preset speeds Number of I/O Analog inputs Logic inputs Analog outputs Logic outputs Relay outputs Safety input	> 150 16 2...4 6...20 1...3 0...8 2...4 1			
Dialogue		Remote graphic display terminal, SoMove setup software (1)			
Communication	Integrated As an option	Modbus and CANopen Modbus TCP, Modbus/Uni-Telway, Fipio, Modbus Plus, Profbus DP, Profbus DP V1, DeviceNet, EthernetIP, CC-Link, INTERBUS			
Cards (available as an option)		Multi-pump cards, I/O extension cards, "Controller Inside" programmable card			
Reduction of current harmonics		Optional AC choke, Altivar AFE (Active Front End)			
EMC filter	Integrated As an option	C3 EMC C1 EMC			
Motor power	kW/HP	90/125 110/150 132/200 160/250 200/300 250/400 315/500 400/600 500/700	ATV71QD90N4 ATV71QC11N4 ATV71QC13N4 ATV71QC16N4 ATV71QC20N4 ATV71QC25N4 ATV71QC31N4 ATV71QC40N4 ATV71QC50N4	T11 T11 T11 T13 T13 T13 T15 T15 T15	—

500 V kW	575 V HP	690 V kW			
90	125	110	—	ATV71QC11Y	T11
110	150	132	—	ATV71QC13Y	T11
132	-	160	—	ATV71QC16Y	T11
160	200	200	—	ATV71QC20Y	T13
200	250	250	—	ATV71QC25Y	T13
250	350	315	—	ATV71QC31Y	T13
315	450	400	—	ATV71QC40Y	T15
400	550	500	—	ATV71QC50Y	T15
500	700	630	—	ATV71QC63Y	T15

(1) SoMove setup software : available during 2011. Altivar 71 also works with the PowerSuite software workshop.

3



Dimensions (in mm) width x height x depth
without remote graphic terminal

T4 : 175 x 295 x 161	T6 : 240 x 420 x 210
T5A : 210 x 295 x 187	T7 : 240 x 550 x 230
T5B : 230 x 400 x 187	

Type of drive	Three-phase 200...240 V	Three-phase 380...480 V	
Supply voltage			
Degree of protection	IP20 for unprotected drives and IP41 on the upper part		
Drive	Output frequency Type of control Asynchronous motor Synchronous motor	0...599 Hz Flux vector control with or without sensor, voltage/frequency ratio Vector control with and without speed feedback	
Speed range	Transient overtorque	220% of nominal motor torque for 2 seconds, and 170% for 60 seconds	
Functions	Number of functions Number of preset speeds Number of I/O Analog inputs Logic inputs Analog outputs Logic outputs Relay outputs Safety input	> 150 16 2...4 6...20 1...3 0...8 2...4 1	
Dialogue		Remote graphic display terminal, SoMove setup software (1)	
Communication	Integrated As an option	Modbus and CANopen Fipio, Ethernet, Modbus Plus, PROFIBUS DP, DeviceNet, Uni-Telway, INTERBUS	
Cards (available as an option)		Encoder interface cards, I/O extension cards, "Controller Inside" programmable card, Encoder emulation card	
Reduction of current harmonics		Integrated DC choke or supplied with the product	
EMC filter	Integrated As an option	C2 EMC up to 5.5 kW External C2 EMC from 7.5 kW	
Motor power	kW / HP / A	4 / 5 / 10 – 5,5 / 7,5 / 14 – 5,5 / 7,5 / 27 ATV71LD27M3Z T5B 7,5 / 10 / 17 – 7,5 / 10 / 33 ATV71LD33M3Z T5B 11 / 15 / 27 – 11 / 15 / 54 ATV71LD54M3Z T6 15 / 20 / 33 – 15 / 20 / 66 ATV71LD66M3Z T6 22 / 30 / 48 –	ATV71LD10N4Z T4 ATV71LD14N4Z T4 ATV71LD17N4Z T5A ATV71LD27N4Z T5B ATV71LD33N4Z T5B ATV71LD48N4Z T7

(1) SoMove setup software : available from 2011. Altivar LIFT is also supported by Powersuite software workshop.



Type of card	I/O extension	Extended
Description	Logic 1 relay logic output ("C/O" contact) 4 x 24 VDC positive or negative logic inputs 2 x 24 VDC open collector positive or negative logic outputs 1 input for PTC probes	 1 x 0...20 mA differential current analog input 1 software-configurable voltage (0...10 VDC) or current (0...20 mA) analog input 2 software-configurable voltage (\pm 10V, 0...10 VDC) or current (0...20 mA) analog inputs 1 relay logic output ("C/O" contact) 4 x 24 VDC positive or negative logic inputs 2 x 24 VDC open collector positive or negative logic outputs, 1 input for PTC probes, 1 frequency control input
Reference	VW3A3201	VW3A3202

"Controller Inside" programmable card



Type of card	Programmable "Controller Inside"
Description	10 logic inputs, 2 of which can be used for 2 counters or 4 of which can be used for 2 incremental encoders 2 analog inputs, 6 logic outputs, 2 analog outputs, a master port for the CANopen bus, a PC port for programming with the PS 1131 software workshop
Reference	VW3A3501

Encoder interface cards



Type of card	Encoder interface with Differential outputs (RS422) Open collector outputs (NPN) Push-pull outputs		
Operating frequency	300 kHz		
Reference	5 V	VW3A3401	—
	12 V	—	VW3A3403
	15 V	VW3A3402	VW3A3404
	24 V	—	VW3A3407

3

Type of card (1)	Resolver	Universal	Sincos Absolute	Incremental with emulation
Speed feedback resolution	12 bits	16 bits	16 bits	10,000
Encoder type supported	Resolver with 2, 4, 6 or 8 poles	"SinCos, SinCosHiperface EnDat, SSI"	Sincos Absolute	"Incremental RS 422 - 5 V or 15 V"
References	VW3A3408	VW3A3409	VW3A3410	VW3A3411

Supported by Altivar LIFT and Altivar71 with S383 firmware version

Notes

3

Accessories Options

Selection guide For Altistart and Altivar range



Communication tools	Remote display terminal (IP54 & IP65)	Remote graphic display terminal	Multi-loader	Simple Loader	Dongle Bluetooth® (TM)
Altistart 01					
Altistart 22	x				x
Altistart 48	x				
Altivar 12	x		x	x	x
Altivar 212		x	x	x	x
Altivar 312	x	x	x	x	x
Altivar 31C	x			x	x
Altivar 32	x	x	x	x	
Altivar LIFT		x	x	x	x
Altivar 61		x	x	x	x
Altivar 71		x	x	x	x
Altivar 61 Plus		x	x	x	x
Altivar 71 Plus		x	x	x	x
Altivar 61Q (Water Cooled)		x	x	x	x
Altivar 71Q (Water Cooled)		x	x	x	x

Accessories & Options	ALTISTART			ALTIVAR											
	01	22	48	12	21	212	312	31C	32	61	71	LIFT	61 Plus	71 Plus	61Q
Panel cut-out adaptor for mounting control unit at 90°									x						
Ferrite suppressors for downstream contactor opening				x			x	x							
Additional EMC filter				x	x		x	x	x	x	x	x	x	x	x
Passive filters										x	x	x	x	x	x
Sinus filters										x	x	x	x	x	x
Line choke		x	x			x	x	x	x	x	x	x	x	x	x
Motor chokes			x				x	x	x	x	x	x	x	x	x
EMC conformity kit			x												
UL Type 1 conformity kit						x				x					
DNV kit			x								x				
Mechanical base kit for mounting GV2 circuit-breaker								x							
Mounting plates				x		x		x	x	x	x	x		x	
Braking resistors for vertical movements											x				
Braking resistors and braking units			x			x		x	x	x	x	x	x	x	x
References	If options or accessories not listed, please refer to the Schneider Electric catalogue.														

For Altivar 1000 or 1100, please consult our Customer Care Centre.



Industrial protocols	ALTISTART			ALTIVAR													
	01	22	48	12	212	312	31C	32	61	71	LIFT	61 Plus	71 Plus	61Q	71Q	1000	1100
Canopen						●	●	●	●	●		●	●	●	●	○	
CANopen Daisy chain						○											
CC-Link								○	○	○	○	○	○	○	○	○	○
DeviceNet			△			○	○	○	○	○	○	○	○	○	○	○	○
EtherCAT								○	●	●							
Ethernet			△														●
Ethernet IP								○	○	○	○	○	○	○	○	○	
Ethernet TCP/IP							○			○							
Fipio			○			○	○		○	○	○	○	○	○	○	○	
INTERBUS S									○	○	○	○	○	○	○	○	
Modbus	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Modbus Plus									○	○	○	○	○	○	○	○	
Modbus TCP						○		○	○	○	○	○	○	○	○	○	
Modbus/ Unitelway								○	○	○	○	○	○	○	○	○	
PROFIBUS DP			△			○	○	○	○	○	○	○	○	○	○	○	●
PROFIBUS DP V0									○	○	○	○	○	○	○	○	
PROFIBUS DP V1									○	○	○	○	○	○	○	○	
References	Please refer to the Schneider Electric catalogue or consult our Customer Care Centre.																

HVAC protocols	ALTISTART			ALTIVAR													
	01	22	48	12	212	312	31C	32	61	71	LIFT	61 Plus	71 Plus	61Q	71Q	1000	1100
Lonworks						○			○			○		○	○		
Metasys N2						●			○			○		○	○		
Apogee FLN						●			○			○		○	○		
BACnet						●			○			○		○	○		
References	Please refer to the Schneider Electric catalogue or consult our Customer Care Centre.																

● Embedded ○ Option △ Gateway

Communication modules



Altistart 48/Altivar 31 starters/drives		Ethernet/ Modbus	DeviceNet/ Modbus	Fipio/Modbus	PROFIBUS DP/Modbus
Parameter setting		–	–	–	Standard configurator ABC configurator program
References	Bridge	TSXETG100	–	–	–
	Gateway	–	LUFP9	LUFP1	LA9P307 LUFP7
Cable references	L = 0.3 m	–	VW3A8306R03	VW3A8306R03	– VW3A8306R03
	L = 1 m	–	VW3A8306R10	VW3A8306R10	VW3P07306R10 VW3A8306R10
	L = 3 m	VW3A8306D30	VW3A8306R30	VW3A8306R30	– VW3A8306R30

Selection guide

3

	<p>⇒ Applications :</p> <p>Lexion 32 is the perfect drive system for applications involving high-precision, dynamic positioning.</p>		<p>⇒ Applications :</p> <p>Lexion SDx stepper drives and motors are used for short-distance positioning applications requiring maximum accuracy and high torque.</p>	
	<p>Servo Drives</p> <p>Lexion 32</p> 		<p>Stepper Drives</p> <p>Lexion SD2</p> 	
	<p>Servo Motors</p> <p>Lexion BMH</p> 		<p>Stepper Motors</p> <p>Lexion BRS2</p> 	
	<p>Lexion BSH</p> 		<p>Lexion SD3</p> 	
Machines	<p>Packaging machines Material handling machines Material working machines Assembling machines</p>		<p>Printing machines Labelling machines Screen printing machines</p>	
Description	<p>The Lexium 32 servo range consists of three high-performance book-size servo drive models – Lexium 32 Compact, Lexium 32 Advanced and Lexium 32 Modular – and two motor families – the versatile medium-inertia Lexium BMH and the dynamic low-inertia Lexium BSH.</p>		<p>The Lexium SDx stepper motor drive range consists of two high-precision stepper drive lines – the three-phase stepper drives Lexium SD3 and the two-phase stepper drives Lexium SD2. These drive lines are complemented by two perfectly matched stepper motor families – Lexium BRS3 three-phase stepper motors and Lexium BRS2 two-phase stepper motors.</p>	
Power range	<p>0.15...7 kW</p>		<p>up to 750 W</p>	
Voltage range	<p>115...240 VAC, 400...480 VAC</p>		<p>24...48 VDC, 115...240 VAC</p>	
Speed	<p>up to 8000 rpm</p>		<p>up to 1000 rpm</p>	
Torque	<p>up to 84 Nm</p>		<p>up to 16.5 Nm</p>	
Communication interfaces	<p>CANopen, CANmotion, PROFIBUS DP, DeviceNet, EtherNet/IP</p>		<p>CANopen, CANmotion, PROFIBUS DP or Pulse/Direction</p>	
	<p>Safety function (STO) on board Enhanced Safety Module (SS1, SS2, SLS, SOS) Encoder module for digital and analog encoders and resolvers</p>		<p>Safety function (STO) on board (Lexium SD3 28)</p>	

⇒ *Applications :*

Lexium Integrated Drives allow for extremely space-saving decentralised motion solutions.

⇒ *Applications :*

The Lexium Linear Motion products are designed for maximum flexibility, performance and cost-effectiveness. This range offers products for all linear movements in the automation industry from single-axis to multi-axis systems.

Integrated Drives

Lexium ILA



Lexium ILE



Lexium ILS



Linear Motion

Lexium PAS



Lexium CAS



Lexium ILP / ILT



Lexium TAS



Lexium MAX



Format adjustment
Printing machines
Material handling machines

Material handling machines
Material working machines
On-the-fly working machines
Assembling machines

The Lexium ILx Integrated Drives comprise motor, positioning controller, power electronics, fieldbus and "Safe Torque Off" safety function in an extremely compact single device. Lexium ILx Integrated Drives are available with all important motor technologies (servo, brushless DC, stepper).

Lexium Linear Motion is a comprehensive linear motion range comprising Lexium PAS portal axes, Lexium TAS linear tables, Lexium CAS cantilever and telescopic axes and Lexium MAX multi-axis systems.

100...370 W

Single axes:

Stroke up to 5.5 m
Load up to 150 kg
Speed up to 8 m/s

24...48 VDC, 115 to 240 VAC

Multi axes:

Stroke up to 5.5 m
Load up to 130 kg
Speed up to 4 m/s

up to 9000 rpm

Available as individual components or completely pre-assembled, customised systems with drives and motors

up to 12 Nm

RS485, CANopen, PROFIBUS DP, DeviceNet, EtherNet/IP, EtherCAT, Ethernet POWERLINK, Modbus TCP, Pulse/Direction

Safety function (STO) on board
(Lexium ILA, Lexium ILE, Lexium ILS)

Stand-alone device with controller inside (Lexium ILP)

Selection guide

3

⇒ Applications :

Lexion Motion Controllers can be used as a stand-alone motion and automation controllers for machines without a PLC or as pure motion controllers for machines in which a PLC takes care of automation control.

Axis controller

Lexion Motion Controllers



Machines

Packaging machines
Material handling machines
Material working machines
Assembling machines

Description

The compact LMC Lexium Motion Controllers are used to control multiple synchronised axes via a motion bus and feature high performance coupled with economy.

Technical information

Synchronisation of up to 4 axes in 2 ms
Synchronisation of up to 8 axes in 4 ms

PLCopen function blocks single / multi axis control
Application function blocks (Rotary knife, Flying shear, Clamping, Grouping/Ungrouping)

Communication interfaces

Modbus, CANmotion, Profibus DP, DeviceNet, Ethernet TCP/IP (for programming)



Controller type	Optimised	Standard	Extended
Drive synchronisation	Up to 4 axes	2 ms	
CAN Motion bus	Up to 8 axes	4 ms	
Interpolation of drive position loops		250 µs	
Internal memory	RAM	1 MB	
	Flash Eeprom	1 MB	
	Protected RAM	60 Kb	
Expert application	Application function blocks	yes	
	Single-axis PLCopen control	yes	
	Multi-axis PLCopen control	yes	
	2D interpolation	yes	
Number of logic inputs	8 + 4 Fast inputs		
Number of logic outputs	8	8	
Communication	Modbus	yes	yes
	CANopen automation	–	yes
	Ethernet TCP/IP	–	yes
	Profibus DP V1	–	yes
	Device Net	–	–
Reference	LMC10	LMC20	LMC20A1307
			LMC20A1309

3

Software solutions



Easy Motion... for configuring motion control functions

- Axis parameter setting
- Drive and controller adjustment and diagnostics
- Creation of position registers via the Teach function
- Management of axis operating modes and manual control
- Configuration of positioning tasks
- Editing cam profiles
- Application back up and restore



Motion Pro... for configuring and programming motion control functions

- Retains the same benefits as Easy Motion mode for motion control
- Creates the whole application, control system function and motion control function, using the programming editor conforming to standard IEC 61131
- Saves the machine signature
- Protection of application programs



Main functions		Lexium 32 Compact	Lexium 32 Advanced	Lexium 32 Modular
Communication	Integrated	Modbus serial link Pulse train	Modbus serial link CANopen, CANmotion machine bus	Modbus serial link Pulse train
	As an option	–	–	CANopen, CANmotion machine bus, DeviceNet, EtherNet/IP, PROFIBUS DP
	Operating modes	Manual mode (JOG) Electronic gearbox Speed control Current control	Homing Manual mode (JOG) Speed control Current control Position control	Homing Manual mode (JOG) Motion sequence Electronic gearbox Speed control Current control Position control
	Functions	Auto-tuning, monitoring, stopping, conversion	Stop window Rapid entry of position values	Stop window Rapid entry of position values Rotary axes Position register
24 V ... logic inputs	6, reassignable	3, reassignable	4, reassignable	
24 V ... capture inputs (1) (2)	–	1	2	
24 V ... logic outputs (1)	5, reassignable	2, reassignable	3, reassignable	
Analog inputs	2	–		
Pulse control input		1, configurable as: RS 422 link 5 V or 24 V push-pull 5 V or 24 V open collector		
ESIM PTO output		RS 422 link		
Safety functions	Integrated	“Safe Torque Off” STO		
	As an option	–	Safe Stop 1 (SS1) and Safe Stop 2 (SS2) Safe Operating Stop (SOS) Safe Limited Speed (SLS)	
Sensor	Integrated	SinCos Hiperface® sensor		
	As an option	–	Resolver encoder Analog encoder Digital encoder	
Architecture		Control via: Logic or analog I/O	Control via: Motion controller via CANopen and CANmotion machine bus	Control via: Schneider Electric or third-party PLCs via communication buses and networks
Type of servo drive		LXM 32C	LXM 32A	LXM 32M



Main functions

Application type	High load, With robust adjustment of the movement	High dynamic range, Power density
Flange size	70, 100, 140 and 205 mm	55, 70, 100 and 140 mm
Continuous stall torque	1.2 to 84 Nm	0.5 to 33.4 Nm
Encoder type	Single turn SinCos: 32,768 points/turn and 131,072 points/turn Multiturn SinCos: 32,768 points/turn x 4096 turns and 131,072 points/turn x 4096 turns	Single turn SinCos: 131,072 points/turn Multiturn SinCos: 131,072 points/turn x 4096 turns
Degree of protection	Casing Shaft end	IP 65 (IP 67 conformity kit as an option) IP 50 or IP 65 (IP 67 conformity kit as an option)
Type of servo motor	Lexium BMH	
	Lexium BSH	

Lexium 32

Lexium 32 motion control Servo drive/servo motor combinations



Lexium 32 servo drive/BMH or BSH servo motor combinations

Servo motors				Lexium 32C, 32A and 32M servo drives 100...120 V single-phase supply voltage with integrated EMC filter			
BMH (IP50, IP65 or IP67)		BSH (IP50, IP65 or IP67)		LXM 32•U90M2 Continuous output current: 3 A rms			
Type of servo motor	Rotor inertia	Type of servo motor	Rotor inertia	Nominal operating point			Stall torques
	kgcm^2		kgcm^2	Nominal torque	Nominal speed	Nominal power	M_0/M_{\max}
		BSH 0551T	0.06	0.49	3000	150	0.5/1.5
		BSH 0552T	0.10	0.77	3000	250	0.8/1.9
		BSH 0553T	0.13				
BMH 0701T	0.59						
		BSH 0701T	0.25				
		BSH 0702T	0.41				
BMH 0702T	1.13						
BMH 0703T	1.67						
		BSH 1001T	1.40				
BMH1001T	3.2						
BMH1002T	6.3						



Lexium 32 servo drive/BMH or BSH servo motor combinations

Servo motors				Lexium 32C, 32A and 32M servo drives 200...240 V single-phase supply voltage with integrated EMC filter			
BMH (IP50, IP65 or IP67)		BSH (IP 50, IP65 or IP67)		LXM 32•U45M2 Continuous output current: 1.5 A rms			
Type of servo motor	Rotor inertia	Type of servo motor	Rotor inertia	Nominal operating point			Stall torques
	kgcm^2		kgcm^2	Nominal torque	Nominal speed	Nominal power	M_0/M_{\max}
		BSH 0551T	0.06	0.45	6000	300	0.5/1.4
		BSH 0552T	0.10				
		BSH 0553T	0.13				
		BSH 0701T	0.25				
BMH 0701T	0.59						
		BSH 0702T	0.41				
		BSH 0703T	0.58				
BMH 0702T	1.13						
		BSH 1001T	1.40				
BMH 0703T	1.67						
BMH 1001T	3.2						
		BSH 1002T	2.31				
BMH 1002T	6.3						
BMH 1003T	9.4						
BMH 1401P	16.5						

LXM 32•U18M2 Continuous output current: 6 A rms				LXM 32•D30M2 Continuous output current: 10 A rms			
Nominal operating point			Stall torques	Nominal operating point			Stall torques
Nominal torque	Nominal speed	Nominal power	M ₀ /M _{max}	Nominal torque	Nominal speed	Nominal power	M ₀ /M _{max}
Nm	rpm	W	Nm/Nm	Nm	rpm	W	Nm/Nm
1.14	3000	350	1.2/3.3				
1.35	2500	350	1.4/4.2				
1.36	2500	350	1.4/3.5				
				2.07	2500	550	2.2/6.1
				2.3	2500	600	2.5/6.4
				3.1	2000	650	3.4/8.7
				2.75	2500	700	3.3/6.3
				3.3	2000	700	3.4/8.9
				3.5	2000	750	6/10.3

LXM 32•U90 M2 Continuous output current: 3 A rms			LXM 32•D18M2 Continuous output current: 6 A rms			LXM 32•D30M2 Continuous output current: 10 A rms					
Nominal operating point			Stall torques	Nominal operating point			Stall torques	Nominal operating point			Stall torques
Nominal torque	Nominal speed	Nominal power	M ₀ /M _{max}	Nominal torque	Nominal speed	Nominal power	M ₀ /M _{max}	Nominal torque	Nominal speed	Nominal power	M ₀ /M _{max}
Nm	rpm	W	Nm/Nm	Nm	rpm	W	Nm/Nm	Nm	rpm	W	Nm/Nm
0.74	6000	450	0.8/2.5								
0.84	6000	550	1.2/3								
0.94	5000	500	1.3/3.5								
1.1	4000	450	1.4/4								
				1.8	5000	950	2.2/7.2				
				2.1	4000	900	2.6/7.4				
				2.1	4000	900	2.5/7.4				
				2.2	4000	900	2.7/7.5				
				2.9	3000	900	3.4/10.2				
				2.8	3000	900	3.4/10.2				
								3.7	4000	1500	5.8/16.4
								4.6	3000	1450	6/18.4
								5.6	2500	1450	8.2/22.8
								6.9	2000	1450	10.3/30.8



Lexium 32 servo drive/BMH or BSH servo motor combinations

Servo motors				Lexium 32C, 32A and 32M servo drives 380...480 V three-phase supply voltage with integrated EMC filter									
BMH (IP50, IP65 or IP67)		BSH (IP50, IP 65 or IP67)		LXM 32•U60N4 Continuous output current: 1.5 A rms				LXM 32•D12N4 Continuous output current: 3 A rms					
Type of servo motor	Rotor inertia	Type of servo motor	Rotor inertia	Nominal torque	Nominal speed	Nominal power	M ₀ /M _{max}	Nominal operating point	Stall torques	Nominal operating point	Stall torques	M ₀ /M _{max}	
	kgcm ²		kgcm ²	Nm	rpm	W	Nm/Nm	Nm		Nm		Nm/Nm	
		BSH 0551P	0.06	0.48	6000	300	0.5/1.5						
		BSH 0552P	0.10	0.65	6000	400	0.8/2.5						
		BSH 0553P	0.13	0.65	6000	400	1.05/3.5						
BMH 0701P	0.59			1.1	3000	350	1.2/4.2						
BMH 0701P	0.59							1.3		5000	700	1.4/4.2	
		BSH 0701P	0.25					1.32		5000	700	1.4/3.5	
		BSH 0702P	0.41					1.64		5000	850	2.2/7.6	
BMH 1001P	3.2							1.9		4000	800	3.3/10.8	
BMH 0702P	1.13							2.2		3000	700	2.5/7.4	
BMH 0703P	1.67												
		BSH 0703P	0.58										
		BSH 1001P	1.40										
BMH 1001P	3.2												
BMH 1002P	6.3												
		BSH 1002P	2.31										
BMH 1003P	9.4												
		BSH 1003P	3.2										
BMH 1401P	16.5												
		BSH 1004P	4.2										
		BSH 1401P	7.4										
BMH 1402P	32.0												
		BSH 1402T	12.7										
		BSH 1403T	17.9										
BMH 1403P	47.5												
		BSH 1404P	23.7										
BMH 2051P	71.4												
BMH 2052P	129												
BMH 2053P	190												

LXM 32●D18N4 Continuous output current: 6 A rms				LXM 32●D30N4 Continuous output current: 10 A rms				LXM 32●D72N4 Continuous output current: 24 A rms			
Nominal operating point			Stall torques	Nominal operating point			Stall torques	Nominal operating point			Stall torques
Nominal torque	Nominal speed	Nominal power	M ₀ /M _{max}	Nominal torque	Nominal speed	Nominal power	M ₀ /M _{max}	Nominal torque	Nominal speed	Nominal power	M ₀ /M _{max}
Nm	rpm	W	Nm/Nm	Nm	rpm	W	Nm/Nm	Nm	rpm	W	Nm/Nm
2.4	5000	1300	3.4/10.2								
2.44	5000	1300	3.1/11.3								
2.7	4000	1100	3.3/9.6								
3.1	4000	1300	3.4/10.2								
3.9	4000	1600	6.2/18.4								
4	4000	1700	5.8/18.3								
				6.2	4000	2600	8.4/25.1				
				6.3	3000	2000	8/28.3				
				7.6	3000	2400	10.3/30.8				
				8.3	2500	2100	10/37.9				
				9.5	2500	2500	11.1/27				
								12.1	3000	3800	16.8/50.3
								12.3	3000	3900	19.5/59.3
								12.9	3000	4100	27.8/90.2
								14.2	3000	4500	24/71.8
								19	2500	5000	33.4/103.6
								25.8	2000	5400	34.4/103.4
								41.6	1500	6500	62.5/170
								52.2	1200	6500	84/232

**Multi-Loader configuration tool**

Use	For downloading configurations from a PC or drive and duplicating them on another drive. The drives do not need to be powered-up. Supplied with: 1 cordset equipped with 2 RJ45 connectors 1 cordset equipped with one type A USB connector and one mini B USB connector 1 x 2 GB SD memory card 1 x female/female RJ 45 adaptor 4 AA 1.5 V LR6 round batteries
Reference	VW3 A8 121

**Single memory card****Pack of 25 memory cards**

Use	Used to store parameters of the Lexium 32 servo drive. Another Lexium 32 servo drive can be commissioned immediately if the application is undergoing maintenance or duplication.
Reference	VW3 M8 705

Reference	VW3 M8 704
------------------	-------------------

Memory card recorder

Use	Writes data from the Lexium 32 servo drive to the memory card. This recorder is not supplied by Schneider Electric.
Reference	See the User's manual

**SoMove setup software**

The SoMove setup software is used to configure, adjust, debug and maintain the Lexium 32 servo drive, as for all other Schneider Electric variable speed drives and starters.
It communicates via Bluetooth® wireless link with the servo drive, which is equipped with the Modbus-Bluetooth® adaptor (VW3 A8 114).

SoMove Mobile application for mobile phone

The SoMove Mobile software converts any compatible mobile phone into a remote graphic display terminal, offering an identical Human-Machine Interface.
Particularly suitable for on-site or remote maintenance operations, the SoMove Mobile software can be used to print out and save configurations, import them from a PC and export them to a PC, or to a servo drive equipped with the Modbus adaptor via the Bluetooth® wireless link.

**Communication modules**

Lexium 32M can be connected to the following communication buses and networks: CANopen and CANmotion, DeviceNet, Profibus DP V1, EtherNet/IP

Reference	CANopen / CANmotion module with 2 * RJ 45 connectors	VW3 A3 608
	CANopen / CANmotion module with SUB-D 9 connector	VW3 A3 618
	DeviceNet module	VW3 M3 301
	Profibus DP V1 module	VW3 A3 607
	EtherNet/IP module	VW3 A3 616
	Module CANopen / CANmotion avec bornier 5 points de vis	VW3 A3 628
	Module EtherCAT with 5 points screw terminal	VW3 A3 601

**Second encoder modules**

Lexium 32M has an input for an additional encoder to connect third party motor (motor encoder) or to improve positioning accuracy (machine encoder)

Reference	VW3 M3 401	Machine	Motor
Module for resolver encoder			x
Module for digital encoder (A/B/I, BiSS, EndDat 2.2, SSI)	VW3 M3 402	x	
Module for analog encoder (1 Vpp/Hall, 1 Vpp, Hiperface)	VW3 M3 403	x (Hiperface only)	x

**Safety module**

eSM safety module allows Lexium 32M servo drives to access additional IEC/EN 61800-5-2 safety functions: SS1, SS2, SLS, SOS

Reference	VW3 M3 501
------------------	-------------------

Connection elements

	Power cordsets		
Description	Cables equipped with one M23 industrial connector (servo motor end)	Cables equipped with one M40 industrial connector (servo motor end)	
From servo motor	BMH 070●●, BMH 100●●, BMH 1401P, BSH 055●●, BSH 070●●, BSH 100●●, BSH 1401P	BMH 1402P, BMH 1403P	BMH 205●P, BSH 1402T, BSH 1403T, BSH 1404P
To servo drive	LXM 32●●●●●	LXM 32●D72N4	LXM 32●D72N4
Composition	[$(4 \times 1.5 \text{ mm}^2) + (2 \times 1 \text{ mm}^2)$]	[$(4 \times 2.5 \text{ mm}^2) + (2 \times 1 \text{ mm}^2)$]	[$(4 \times 4 \text{ mm}^2) + (2 \times 1 \text{ mm}^2)$]
Length	3 m	3 m	3 m
Reference	VW3 M5 101 R30	VW3 M5 102 R30	VW3 M5 103 R30

Encoder cordsets


Description	SinCos Hiperface® encoder cables equipped with an M23 industrial connector (servo motor end) and an RJ45 connector with 8 + 2 contacts (servo drive end)
From servo motor	BMH ●●●●●, BSH ●●●●●
To servo drive	LXM 32●●●●●
Composition	[$3 \times (2 \times 0.14 \text{ mm}^2) + (2 \times 0.34 \text{ mm}^2)$]
Length	3 m
Reference	VW3 M8 102 R30



Assignment of BRS2 2-phase stepper motors and SD2 stepper motor drives

BRS2 2-phase stepper motors	SD21●U20C	SD21●U50C
BRS236	24...48 V; 3 A	24...48 V; 5 A
BRS242	0.07 Nm	—
BRS257	0.23...0.53 Nm	—
BRS285	0.64...1.69 Nm	0.64...1.69 Nm
	—	2.96...9.20 Nm

3

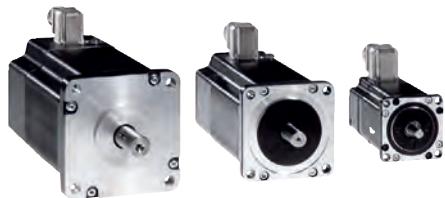

Assignment of BRS3 3-phase stepper motors and SD3 stepper motor drives

BRS3 3-phase stepper motors	SD326●U25	SD328●U25	SD326●U68	SD328●U68
BRS368	115 V / 230 V; 2.5 A; including mains filter	115 V / 230 V; 6.8 A; including mains filter and fan	—	—
BRS397	1.7 Nm / 1.5 Nm	—	—	—
BRS39A	2.3 Nm / 2.0 Nm	—	—	—
BRS39B	4.5 Nm / 4.0 Nm	—	—	—
BRS3AC	6.8 Nm / 6.0 Nm	—	13.5 Nm / 12.0 Nm	—
BRS3AD	—	—	—	19.7 Nm / 16.5 Nm



Assignment of stepper motors, stepper motor drives SD3 15

3-phase stepper motors	SD3 15
	24...48 VDC; max. 10 A
Motors with F winding	
BRS 364F	0.46 Nm / 0.40 Nm
BRS 366F	0.92 Nm / 0.80 Nm
BRS 368F	1.50 Nm / 1.30 Nm
BRS 397F	2.00 Nm / 1.85 Nm
BRS 39AF	4.20 Nm / 3.40 Nm
BRS 39BF	5.55 Nm / 4.80 Nm
Motors with H winding	
BRS 364H	0.51 Nm / 0.45 Nm
BRS 366H	1.02 Nm / 0.90 Nm
BRS 368F	1.70 Nm / 1.50 Nm
BRS 397H	2.26 Nm / 2.00 Nm
BRS 39AH	4.80 Nm / 4.00 Nm
BRS 39BH	6.50 Nm / 5.75 Nm



Integrated Drives	Lexium ILA	Lexium ILE	Lexium ILS	Lexium ILP / ILT
Type of process	Dynamic process and accurate positioning	Automatic format adjustement	Short distance movements with accurate positioning	
Type of technology	Integrated drive with servo motor	Integrated drive with dc brushless motor	Integrated drive with three-phase stepper motor	Integrated drive with two-phase stepper motor
Main characteristics	Highly dynamic Compact Integrated holding brake in option	High holding torque without power Integrated gearbox in option	High torque at low speed	
Dynamic	★★★★	★★	★★★	★★★
Precision and stability	★★★★	★★	★★★★	★★★★
Energy saving	★★★★★	★★★★	★★	★★
Motor inertia	Medium			
Control interface	Control signals	Input/output	Pulse/direction Input/output	Pulse/direction Input/output
	Bus and networks	CANopen, PROFIBUS DP, RS 485 serial link, DeviceNet, EtherCAT, Modbus TCP, Ethernet Powerlink, EtherNet/IP		CANopen, RS485
	Motion bus	—		
Association	Nominal power	150...305W	100...350W	100...350W
Drive/motor combinations	Nominal speed	500...9000 min ⁻¹	1500...7000 min ⁻¹	0...1000 min ⁻¹
	Nominal torque	0.26...0.78 Nm	0.18...0.5 Nm	0.45...6 Nm
Drive characteristics	Safety function	“Safe Torque Off”		
Motor characteristics	Type of sensor (resolution) (1)	Single turn SinCos encoder (16.384 increments/turn) Multiturn SinCos encoder (16.384 increments/turn × 4096 turns)	Absolute value encoder (12...1380 increments/turn)	Index pulse monitoring
	Motor flange size	57	66	57, 85
Accessories		Cable, Connector kits, Installation sets, Commissioning tools, Planetary gearboxes		Cable, Connector kits, Installation sets, Commissioning tools
References	ILA	ILE	ILS	ILP
				ILT

Lexium ILA/ILE/ILS Motion Control

Lexium Integrated Drives



Lexium ILA with Servo Motor	Nominal Torque (Nm)	Maximum Torque (Nm)	Nominal Speed (Rpm)	Maximum Speed (Rpm)	Nominal Power (W)
ILA1 for CANopen, PROFIBUS DP, RS485, Pulse-Direction, Motion Sequence Mode					
ILA1•571P	0.26	0.6	5500	7500	150
ILA1•571T	0.26	0.43	7500	11500	200
ILA1•572P	0.45	0.72	4300	6200	200
ILA1•572T	0.41	0.61	5000	7500	215
ILA2 for DeviceNet, EtherCAT, EtherNet/IP, Modbus TCP, Ethernet Powerlink					
ILA2•571P	0.44	0.62	5100	7000	235
ILA2•571T	0.31	0.45	7000	9000	255
ILA2•572P	0.78	1.62	3400	4300	275
ILA2•572T	0.57	0.85	5100	6800	305



Lexium ILE with included spurwheel gearbox.

Ratios: 18:1, 38:1, 54:1, 115:1

Lexium ILE with included worm gearbox with hollow shaft.

Ratios: 24:1, 54:1, 92:1, 115:1

Lexium ILE with Brushless DC Motor	Nominal Torque (Nm)	Detent Torque (Nm)	Nominal Speed (Rpm)	Maximum Speed (Rpm)
ILE1 for CANopen, PROFIBUS DP, RS485				
ILE1•661	0.24	0.08	4800	5000
ILE1•661 spurwheel gearing	up to 11.0	up to 8.0	44	44
ILE1•661 worm gearing	up to 10.6	up to 16.7	44	44
ILA2 for DeviceNet, EtherCAT, EtherNet/IP, Modbus TCP, Ethernet Powerlink				
ILA2•661	0.26	0.08	6000	7000
ILA2•661 spurwheel gearing	up to 12	up to 9.19	44	44
ILA2•661 worm gearing	up to 10.6	up to 16.7	44	44
ILA2•662	0.5	0.106	5000	7000



Lexium ILS with three-phase Stepper Motor	Maximum Torque (Nm)	Holding Torque (Nm)	Speed (Rpm)
ILS1 for CANopen, PROFIBUS DP, RS485, Pulse-Direction, Motion Sequence Mode			
ILS1•571•	0.45	0.51	1000
ILS1•572•	0.9	1.02	600
ILS1•573•	1.5	1.7	450
ILS1•851•	2.0	2.0	450
ILS1•852•	4.0	4.0	200
ILS1•853P	6.0	6.0	120
ILS1•853T	4.5	4.5	300
ILS1 for CANopen, PROFIBUS DP, RS485, Pulse-Direction, Motion Sequence Mode			
ILS2•571•	0.45	0.51	1100
ILS2•572•	0.9	1.02	900
ILS2•573•	1.5	1.7	600
ILS2•851•	2.0	2.0	600
ILS2•852•	4.0	4.0	380
ILS2•853P	6.0	6.0	200
ILS2•853T	4.5	4.5	300



Lexium ILP, Lexium ILT with two-phase Stepper Motor	Nominal Torque (Nm)	Holding Torque (Nm)	Maximum Speed (Rpm)
ILP for RS485 with programmable interface			
ILP2R361	0.11	0.11	1800
ILP2R421	0.19	0.19	1500
ILP2R422	0.33	0.33	1500
ILP2R423	0.39	0.39	1500
ILP2R571	0.63	0.63	1500
ILP2R572	0.86	0.86	1500
ILP2R573	1.44	1.44	1500
ILP2R574	1.77	1.77	1500
ILP2R851	2.13	2.13	1000
ILP2R852	3.12	3.12	1000
ILP2R853	5.87	5.87	1000
ILT for Pulse/Direction, CANopen			
ILT2•361	0.11	0.11	1800
ILT2•421	0.19	0.19	1500
ILT2•422	0.33	0.33	1500
ILT2•423	0.39	0.39	1500
ILT2•571	0.63	0.63	1500
ILT2•572	0.86	0.86	1500
ILT2•573	1.44	1.44	1500
ILT2•574	1.77	1.77	1500
ILT2•851	2.13	2.13	1000
ILT2•852	3.12	3.12	1000
ILT2•853	5.87	5.87	1000

Lexium Linear Motion

Motion Control Linear axes



Product	Lexium PAS B	Lexium PAS S
Axis type	Portal axes	
Movement	Number of directions	1
	Movement type	Typically horizontal
	Position of the load	On carriage
Drive	Toothed belt	Ballscrew
Type of guide	Ball or roller	Ball
Main characteristics	High dynamic response, Long stroke length, High positioning speed	High precision movement (positioning, repeatability, guiding), High feed forces, High rigidity
Dynamic response	★★★★★	★★★
Precision	★★★	★★★★★
Maximum payload	100 kg	100 kg
Maximum driving force	2600 N	4520 N
Maximum speed of movement of the load	8 m/s	1.25 m/s
Maximum working stroke	5500 mm	3000 mm
Repeatability	± 0.05 mm	± 0.02 mm
Options	Choice of guide type: Ball (for applications requiring high forces and torques) or roller (simple, cost-effective solution), Wide range of sensors, Choice of carriage type for adapting to the load, Option to add carriages, Protective metal strip.	Choice of pitch, Protective metal strip, Wide range of sensors, Choice of carriage type for adapting to the load, Option to add carriages, Option to add ballscrew supports for longer axes
Reference	PAS 4•B	PAS 4•S


Multi-axis systems



Product	Lexium MAX H	Lexium MAX S
Axis type	Double portal axes	
Movement	Number of directions	1
	Movement type	Combination of two parallel axes
	Position of the load	On two parallel carriages
Multi-axis system type	PAS 4•B axes + PAS 4•H support axis (driven by the load)	PAS 4•B + PAS 4•B axes (shaft-driven)
Drive	Toothed belt on one axis	Toothed belt on both axes
Type of guide	Ball or roller	Ball or roller
Main characteristics	Long stroke length, High dynamic response, High precision movement (positioning, guiding)	Long stroke length, High precision movement (positioning, guiding), High feed forces
Maximum payload	250 kg	300 kg
Maximum working stroke	On the X-axis	5500 mm
	On the Y-axis	–
	On the Z-axis	–
Options	Choice of guide type: Ball (for applications requiring high forces and torques) or roller (simple, cost-effective solution), Protective metal strip, Anti-corrosion version, Anti-static belt, Wide range of sensors, Several different motor mounting options, Variable distance between the two axes	
Reference	MAX H	MAX S



Lexium TAS	Lexium CAS 4	Lexium CAS 3	Lexium CAS 2
Linear tables	Cantilever axes with mobile structure on profile	Cantilever axes with mobile structure on parallel rods	Telescopic axes
1			
Typically horizontal	Typically vertical		Typically horizontal
On carriage	On the side of the profile or on the 2 end blocks	On the 2 end blocks	On carriage
Ballscrew	Toothed belt	Toothed belt or rack	Toothed belt
Double, ball	Ball or roller	Ball	Ball or roller
High precision movement (positioning, repeatability, guiding), High feed forces, Option to mount the load on the side of the profile or on the end blocks, High rigidity, Feed movement without mechanical backlash	Long stroke length, High feed forces, Option to mount the load on the side of the profile or on the end blocks, High rigidity	Compact, Mobile structure with light travel weight	Long stroke length from a compact unit, High rigidity, High dynamic response
★★	★★★★	★★★★	★★★★
★★★★★	★★★	★★	★★
150 kg	50 kg	18 kg	35 kg
2580 N	2150 N	705 N	1500 N
1 m/s	3 m/s	3 m/s	3 m/s
1500 mm	1200 mm	500 mm	2400 mm
± 0.02 mm	± 0.05 mm	± 0.05 mm	± 0.1 mm
Choice of pitch , Several different motor mounting options	Choice of guide type: Ball (for applications requiring high forces and torques) or roller (simple, cost-effective solution), Protective metal strip, Anti-corrosion version, Wide range of sensors	Anti-corrosion version, Anti-static belt	Choice of guide type: Ball (for applications requiring high forces and torques) or roller (simple, cost-effective solution), Choice of carriage type for adapting to the load
TAS 4	CAS 4	CAS 3	CAS 2

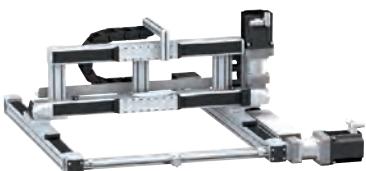

Lexium MAX P	Lexium MAX R2	Lexium MAX R3
Linear positioners	Portal robots	
2		3
Horizontal and vertical: Combination of one X-axis and one Z-axis	Horizontal: Combination of two perpendicular axes X and Y	Horizontal and vertical: Combination of two perpendicular axes X and Y and one Z-axis
On the side or on the end blocks of the Z-axis profile	On the Y-axis carriage	On the side or on the end blocks of the Z-axis profile
MAX S + CAS 4 axes	MAX S + MAX H axes	MAX S + MAX H + CAS 4 axes
MAX S + CAS 3 axes	MAX S + PAS 4•B axes	MAX S + MAX H + CAS 3 axes
Toothed belt on each axis		
Ball or roller		
Dynamic load positioning	Long stroke length on both axes	Long stroke length on three axes
50 kg	130 kg	50 kg
5500 mm		
-	1500 mm	1500 mm
1200 mm	-	1200 mm
Choice of guide type: Ball (for applications requiring high forces and torques) or roller (simple, cost-effective solution), Wide range of sensors Supplied as standard: Protective metal strip , Anti-corrosion version		
MAX P	MAX R•2	MAX R•3